BRAYTON

BRAYTON

WOVEN

Anchor 2-3

Aquaclean® Duoro, Ebro, Garonne, Mino, Sil, Tagus 4-7

Cameron 8-9

Estate Tweed 10-11

Fuse 12-13

Jilly Twill 14-15

Killian 16-17

Nimbus 18-19

Pebble 20-21

Plaid Perfect 22-23

Rhyme 24-25

Tally 26-27

Tulip 28-29

Walden 30-31

Woodland 32-33

ALMOST®

About Almost® 34

Custom Color Emboss 35

Almost® 36-37

Almost® Asheville 38-39

Almost® Avante 40-41

Almost® Barcelona, ... 42-43

Almost® Buffed 44-45

Almost® Calf 46-47

Almost® Cambridge 48-49

Almost® Classic 50-51

Almost® Glove 52-53

Almost® Icon 54-55

Almost® Matte 56-57

Almost® Nappa 58-59

Almost® Ostrich 60-61

Almost® Pearl 62-63

Almost® Suede 64-65

Almost® Textura 66-67

Almost® Vogue 68-69

NON-WOVEN

Bayside 70-71

Boho 72-73

Ginseng 74-75

Harbor 76-77

Harmony 78-79

Tolstoy II 80-81

Viva 82-83

Leather

Copenhagen 84-85

Anchor

SUPREEN®
The fabric that keeps liquid out and beauty in

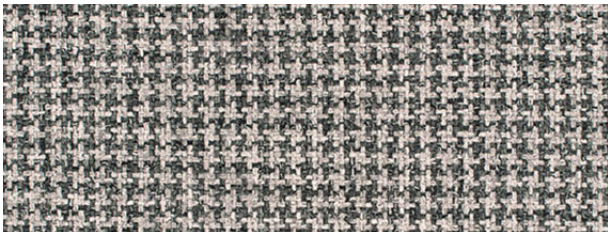

AC01 Puget Sound

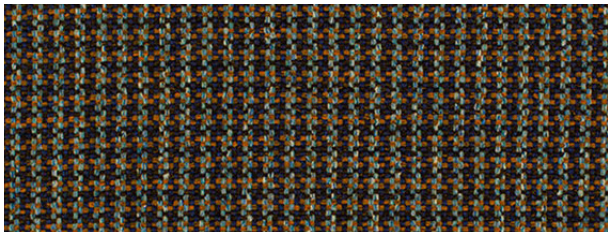

AC02 Pike Place

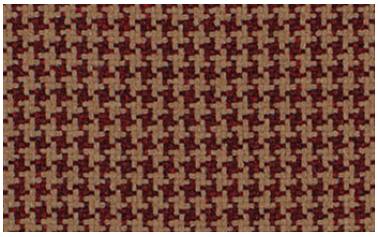

AC03 Golden Garden

AC04 Cannon Beach

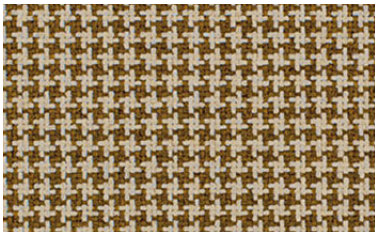

AC05 Trek

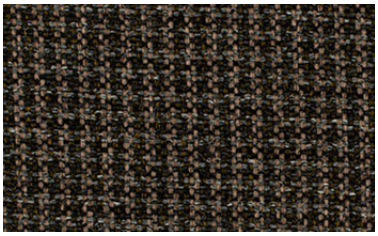

AC06 Coffee Bean

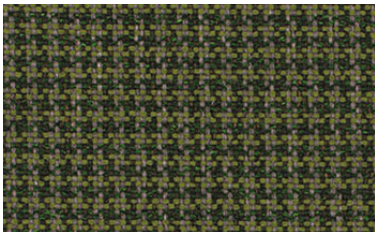

AC07 Green Lake

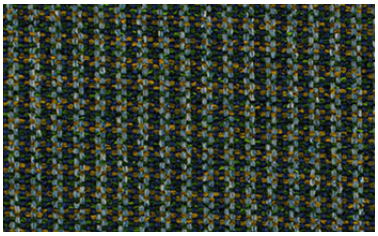

AC08 Cascades

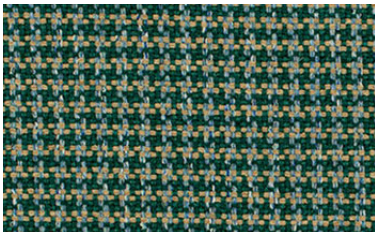

AC09 Olympia

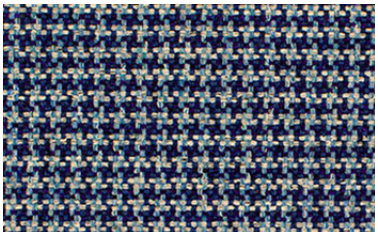

AC10 Seattle

AC11 Carbon River

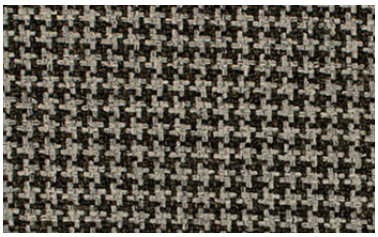

AC12 Harbor Island

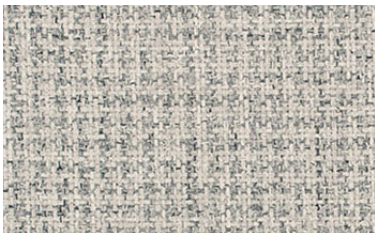

AC13 Silver Lake

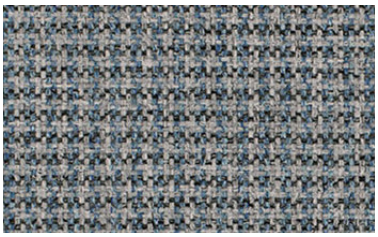

AC14 Crystal Falls

BRAYTON | TEXTILES

Anchor

SUPREEN®
The fabric that keeps liquid out and beauty in

General Specifications

Composition:	91% Polyester | 7% Polyurethane | 2% Silicone
Finish:	SUPREEN® Stain Repellent (Silicone Based, PFAS Free)
Backing:	SUPREEN® Liquid Barrier (Polyurethane)
Width:	54"
Weight:	16.7 ounces/linear yard
Repeat:	None
Pattern Direction:	Non-Directional
Country of Origin:	China

Performance Characteristics

Abrasion Resistance:	200,000+ Double Rubs (Wyzenbeek)* (ASTM D4157)
Tear Strength:	Warp: 46.0 lbs. / Fill: 44.4 lbs. (ASTM D2261-13)
Breaking Strength:	Warp: 225 lbs. / Fill: 195 lbs. (ASTM D5034-09)
Seam Slippage:	Warp: 88.5 lbs. / Fill: 89.5 lbs. (ASTM D4034-92)
Crocking Resistance:	Dry: Class 4.5 / Wet: Class 5.0 (AATCC 8)
Colorfastness to Light:	Class: 5.0 / 40 hours (AATCC 16.3)

ACT® Registered Certification Marks

**Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance.*

Note: Dye lots may vary slightly.

Flammability Specifications

CAL TB 117-2013 - Pass | UFAC Class 1 | NFPA 260 Class 1

Cleaning & Care

W/S/B, Regular vacuuming is recommended. Spot clean the soiled area with mild soap and water, then wipe or rinse with fresh water.
Bleach Cleanable: 1:10 household bleach to water solution.

Sustainability

Prop 65 Compliant
No FR Additives – AB2998 Compliant
No Antimicrobial / Antibacterial Additives
PFAS Free
Heavy Metal Free
BPA Free / Tris Free / Formaldehyde Free
Does Not Contain Conflict Minerals
REACH Compliant
ROHS Compliant
HHI / Greenhealth Compliant

View additional colorways and the complete collection at braytontextiles.com

BRAYTON | TEXTILES

AQUA COLLECTION

Fabrics you can clean with just water

aquaclean
fabrics for living

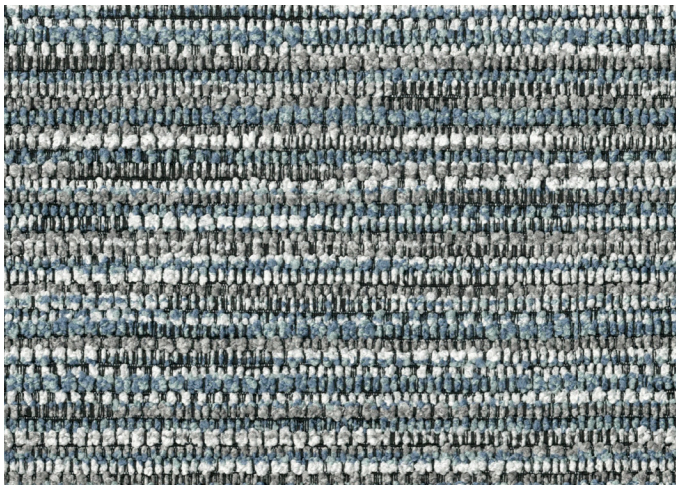

DUORO DU347 Azul

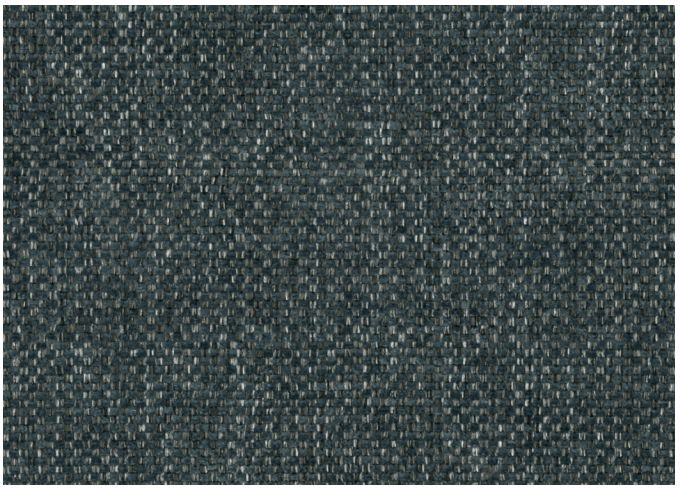

MINO MN395 Anil

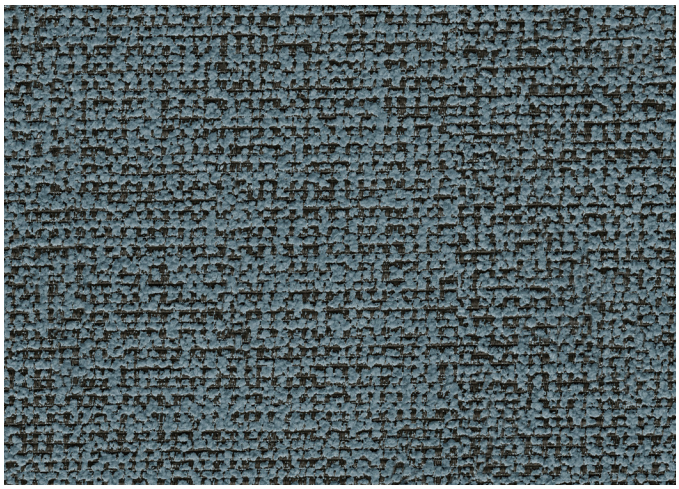

SIL SL53 Oceano

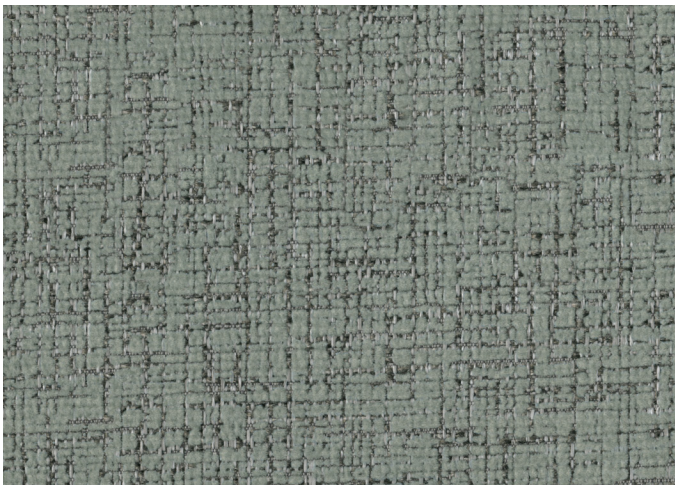

TAGUS TG165 Rocas

EBRO EB395 Mar

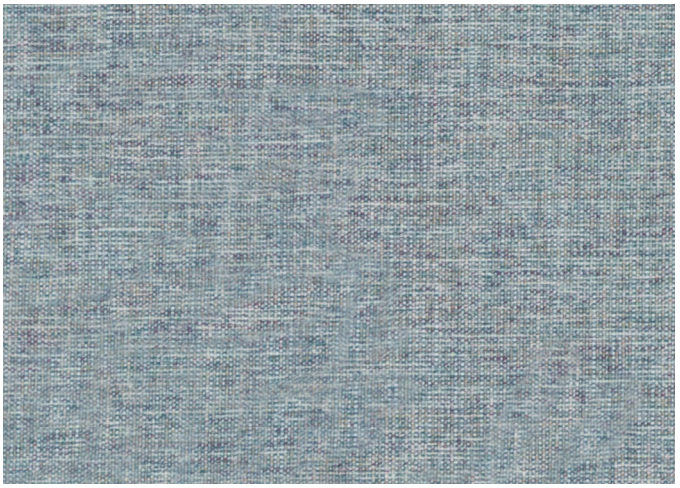

GARONNE GA321 Lago

BRAYTON
PAUL BRAYTON DESIGNS

AQUA COLLECTION

Fabrics you can clean with just water

aquaclean
fabrics for living

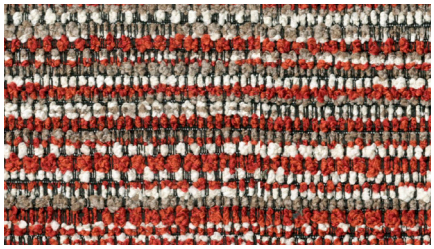

DUORO

CONTENT: 100% Recycled Polyester
GRADE: 2
WEIGHT: 14.570 OZ/LY
REPEAT: 12.75″V x 13.97″H

EBRO

CONTENT: 100% Polyester
GRADE: 2
WEIGHT: 15.897 OZ/LY
REPEAT: 4.4″V x 13.97″H

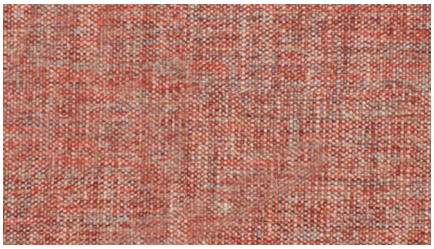

GARONNE

CONTENT: 88% Polyester,
7% Viscose, 5% Acrylic
WEIGHT: 14.806 OZ/LY
GRADE: 2

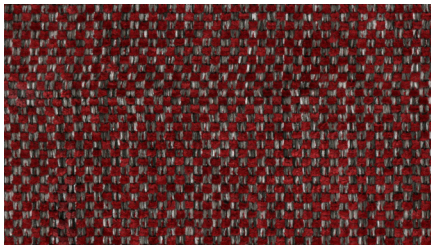

MINO

CONTENT: 86% Polyester,
12% Recycled Cotton,
2% Others
WEIGHT: 13.655 OZ/LY
GRADE: 1

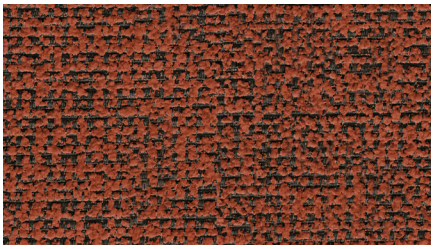

SIL

CONTENT: 68% Recycled Polyester,
28% Polyester,
4% Polyamide
WEIGHT: 12.653 OZ/LY
GRADE: 1

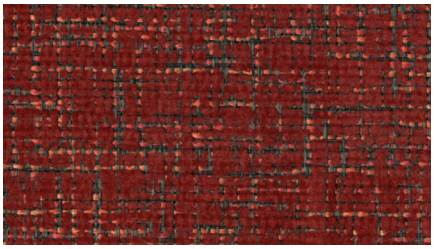

TAGUS

CONTENT: 75% Polyester,
10% Recycled Cotton,
8% Acrylic, 7% Polyamide
WEIGHT: 14.068 OZ/LY
GRADE: 1

FINISH:	Aquaclean
BACKING:	None
COUNTRY OF ORIGIN:	Spain
WIDTH: 55”	**PATTERN DIRECTION:** Shown up the roll
APPLICATION:	Indoor
DURABILITY:	100,000 Double Rubs - Wyzenbeek
FLAMMABILITY NOTES:	FR Free
CLEANING CODE:	W
BREAKING STRENGTH:	ASTM D 5034-21 - Pass
CAL 117 2013:	Pass
ENVIRO BENEFITS:	PFAS Free, No added flame retardant chemicals, mildew resistant, no added antibacterial / anti-microbial chemicals, lead free, heavy metal free, formaldehyde free, BPA free
ACT SYMBOLS:	

**Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention. **ACT Registered Certification Mark*

aquaclean
fabrics for living

WATER CLEANING IN THREE SIMPLE STEPS

1. Remove any excess residue from your upholstery.
2. Apply water* over the stain, either directly or using a damp cloth, then wait a few seconds.
3. Finally, press down with the damp cloth and rub gently over the fabric in circular movements. If the stain does not come off completely (especially dried in stains) repeat the process as required.

**To avoid potential limescale stains, it is preferable to use bottled water.*

Scan for comprehensive Aquaclean maintenance and water cleaning instructions.

SAFEFRONT HYGIENE PROTECTION

Thanks to SafeFront® technology, our fabrics are protected against viruses and bacteria. They have been proven to reduce viral activity by over 91% after two hours of continuous contact.

OEKO TEX® STANDARD 100 | PFC FREE | Global Recycled Standard

www.paulbraytondesigns.com | 800.882.4720 | requests@paulbraytondesigns.com

AQUA COLLECTION

Fabrics you can clean with just water

aquaclean
fabrics for living

TAGUS TG76 Coco

SIL SL151 Leche



TAGUS TG139 Azucar

DUORO DU90 Papel

EBRO EB32 Plomo

GARONNE GA314 Sol



MINO MN314 Maiz

EBRO EB314 Amarillo



TAGUS TG420 Mostaza



DUORO DU357 Dorado



GARONNE GA323 Pasto

DUORO DU407 Arbol



SIL SL407 Oliva

EBRO EB395 Mar

GARONNE GA321 Lago



DUORO DU347 Azul



SIL SL53 Oceano



TAGUS TG78 Cielo



TAGUS TG165 Rocas



MINO MN395 Anil

BRAYTON
PAUL BRAYTON DESIGNS



GARONNE GA14 Noche

EBRO EB324 Rosado



MINO MN34 Violeta



DUORO DU30 Ceresa



GARONNE GA30 Uvas



MINO MN305 Melon

EBRO EB305 Salmon



MINO MN28 Rojo



TAGUS TG80 Vino



SIL SL30 Rosas



DUORO DU302 Morado



TAGUS TG72 Marron



DUORO DU27 Madera



SIL SL11 Tierra



TAGUS TG164 Cafe



GARONNE GA13 Canosa



MINO MN1300 Plateado



SIL SL271 Gris



TAGUS TG77 Piedra



TAGUS TG110 Plata

Cameron

SUPREEN®
The fabric that keeps liquid out and beauty in

CM01 Harbor

CM02 Jetty

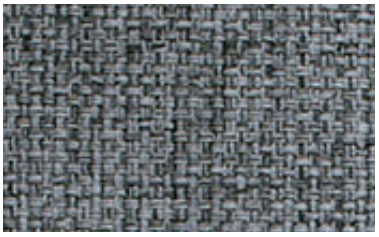

CM03 Fog

CM04 Blue Lake

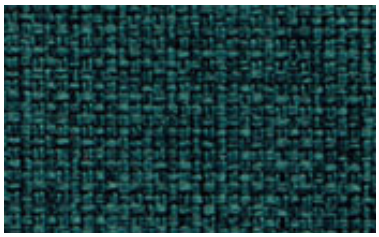

CM05 Aquatic

CM06 Starboard

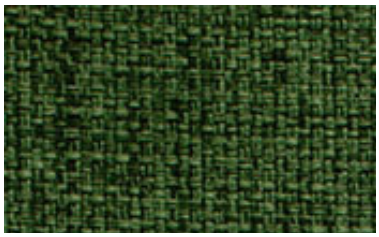

CM07 Marina

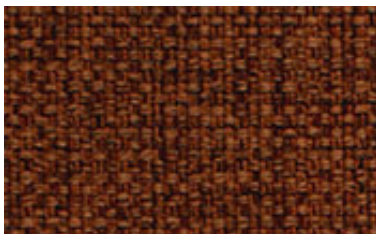

CM08 Copper Kettle

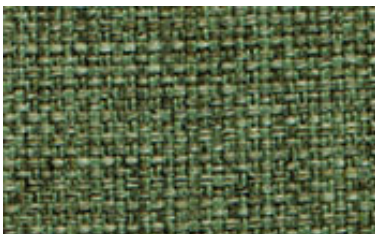

CM09 Wake

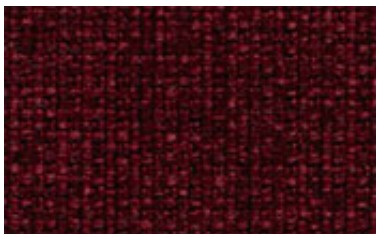

CM10 Port

CM11 Pontoon

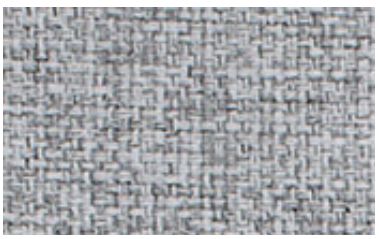

CM12 Deck

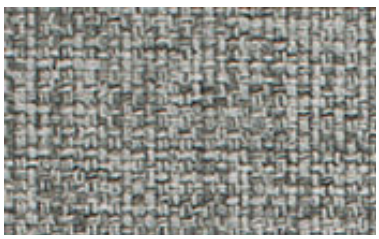

CM13 Mast

BRAYTON | TEXTILES

Cameron

SUPREEN®
The fabric that keeps liquid out and beauty in

General Specifications

Composition:	94% Polyester | 4% Polyurethane | 2% Silicone
Finish:	SUPREEN® Stain Repellent (Silicone Based, PFAS Free)
Backing:	SUPREEN® Liquid Barrier (Polyurethane)
Width:	54"
Weight:	21.7 ounces/linear yard
Repeat:	None
Pattern Direction:	Non-Directional
Country of Origin:	China

Performance Characteristics

Abrasion Resistance:	100,000+ Double Rubs (Wyzenbeek)* (ASTM D4157)
Tear Strength:	Warp: 69.5 lbs. / Fill: 93.7 lbs. (ASTM D2261-13)
Breaking Strength:	Warp: 302 lbs. / Fill: 329 lbs. (ASTM D5034-09)
Seam Slippage:	Warp: 82.5 lbs. / Fill: 80.0 lbs. (ASTM D4034-92)
Crocking Resistance:	Dry: Class 4.5 / Wet: Class 4.5 (AATCC 8)
Colorfastness to Light:	Class 4.5 / 40 Hours (AATCC 16.3)

ACT® Registered Certification Marks

**Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance.*

Note: Dye lots may vary slightly.

Flammability Specifications

CAL TB 117-2013 - Pass | UFAC Class 1 | NFPA Class 1

Cleaning & Care

W/S/B, Regular vacuuming is recommended. Spot clean the soiled area with mild soap and water, then wipe or rinse with fresh water.

Bleach Cleanable: 1:10 household bleach to water solution.

Sustainability

Prop 65 Compliant
No FR Additives – AB2998 Compliant
No Antimicrobial / Antibacterial Additives
PFAS Free
Heavy Metal Free
BPA Free / Tris Free / Formaldehyde Free
Does Not Contain Conflict Minerals
REACH Compliant
ROHS Compliant
HHI / Greenhealth Compliant

View additional colorways and the complete collection at braytontextiles.com

BRAYTON | TEXTILES

Estate Tweed

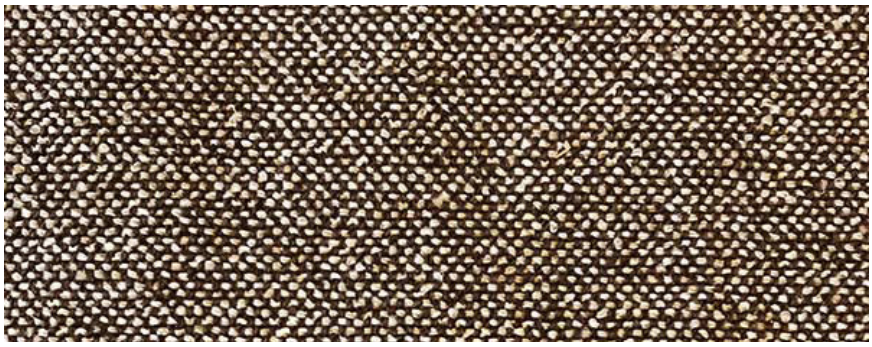

ET-01 Fleming

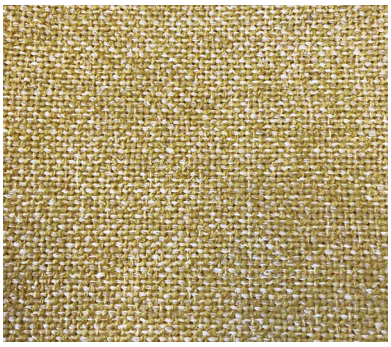

ET-02 Paterson

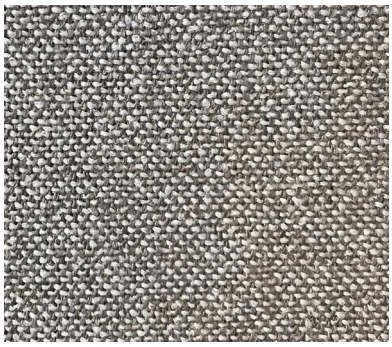

ET-03 Stewart

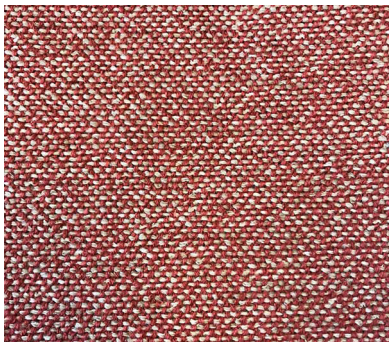

ET-04 Crawford

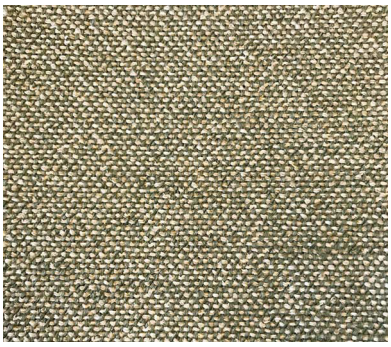

ET-05 Malcolm

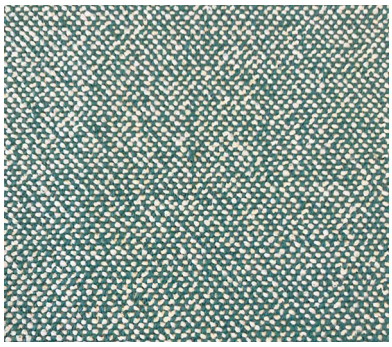

ET-06 Douglas

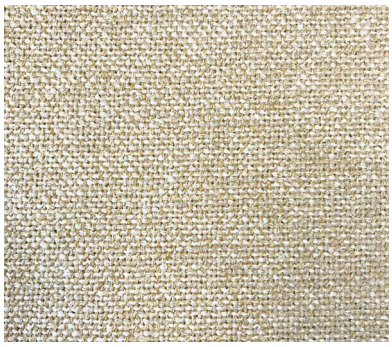

ET-07 Fletcher

ET-08 Gordon

ET-09 Brodie

ET-10 Mitchell

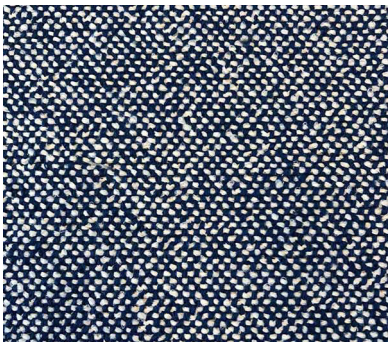

ET-11 Murray

BRAYTON
PAUL BRAYTON DESIGNS

Estate Tweed

Content:
63% Polyester; 37% Acrylic

Grade: 1

Width:
54”

Weight:
17.60 oz / LY

Country Of Origin:
USA

Standard Backing:
Latex Acrylic

Pattern Direction:
Railroaded

Abrasion:
75,000 double rubs, Wyzenbeek*

Cleaning Code:
WS

AATC-8 / Crocking:
Pass

NFPA 260 (UFAC):
Pass

Cal 117 2013:
Pass

ACT Symbols:

**Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.*

***ACT® Registered Certification Marks*

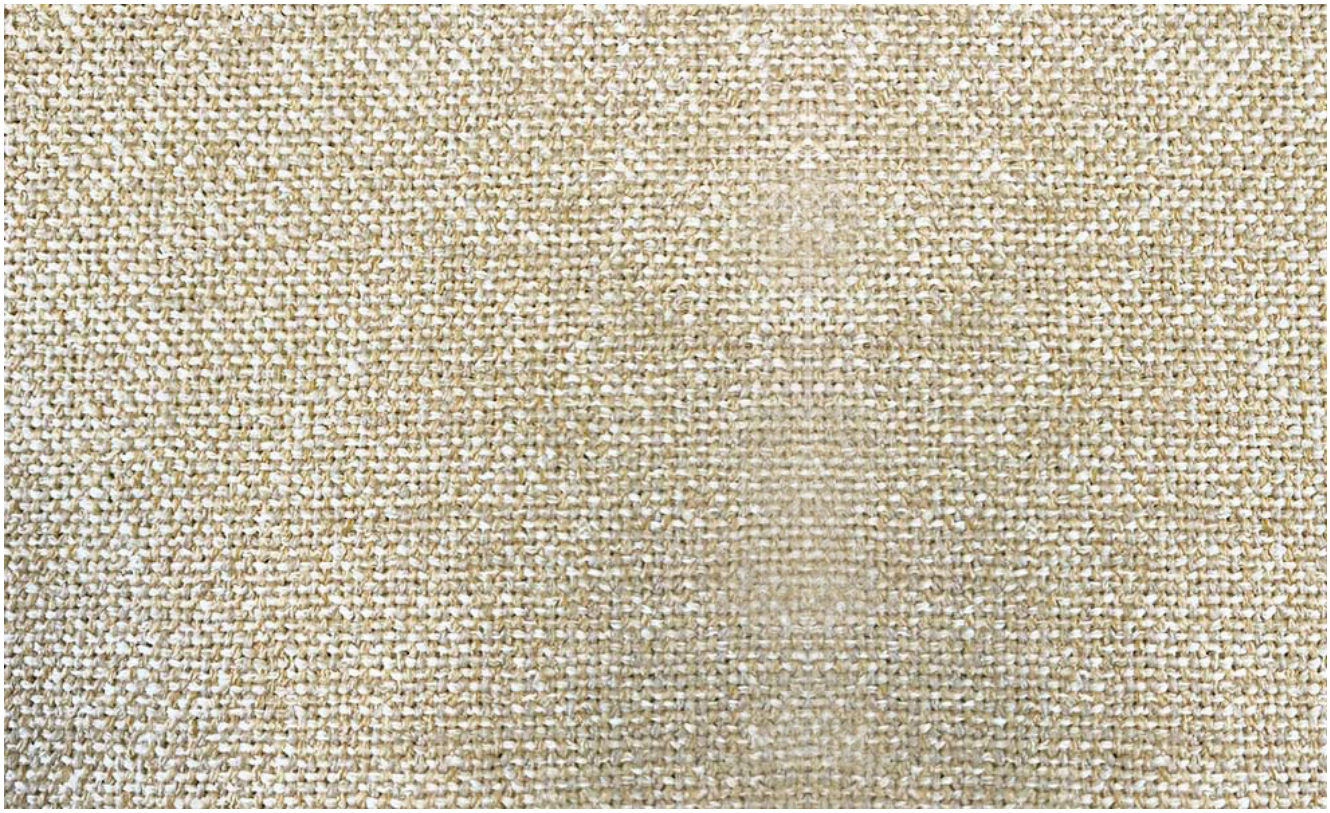

Fuse

FS01 Chicago

FS02 Savanna

FS03 Phoenix

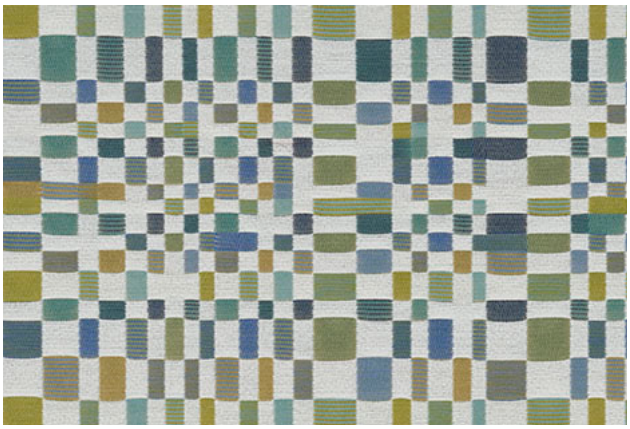

FS04 Charlotte

FS05 Portland

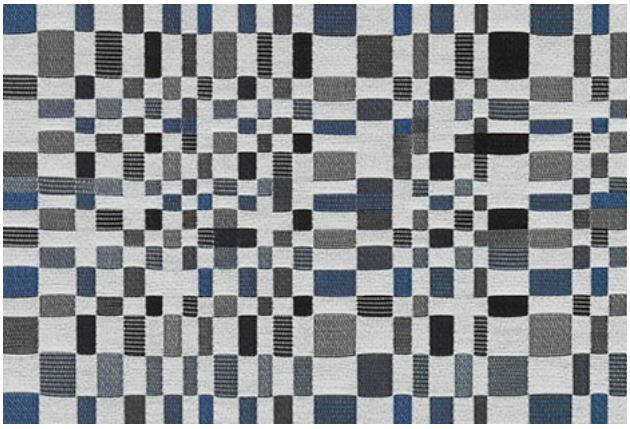

FS06 Philadelphia

BRAYTON | TEXTILES

Fuse

General Specifications

Composition:	36% Acrylic, 34% Post Consumer Polyester, 30% Nylon
Finish:	DEFEND® Free Water Repellent (PFAS Free)
Backing:	None
Width:	54"
Weight:	16.78 ounces/linear yard
Repeat:	9.5" V, x 9.625" H
Pattern Direction:	Up the Roll
Country of Origin:	USA

Performance Characteristics

Abrasion Resistance:	100,000 Double Rubs (Wyzenbeek)* (ASTM D4157)
Brush Pilling:	Class 5 (ASTM D-3511)
Breaking Strength:	Warp: 279 lbs. / Fill: 290.1 lbs. (ASTM D5034-21)
Seam Slippage:	Warp: 112.9 lbs. / Fill: 67.7 lbs. (ASTM D4034-19)
Crocking Resistance:	Dry: Class 5.0 / Wet: Class 5.0 (AATCC 8)
Colorfastness to Light:	Class: 5.0 / 40 hours (AATCC 16.3)

ACT® Registered Certification Marks

**Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance.*

Note: Dye lots may vary slightly.

Flammability Specifications

CAL TB 117-2013 - Pass

Cleaning & Care

W/S/B, Regular vacuuming is recommended. Clean stains with mild soap and water, then rinse with fresh water and blot dry with a clean cloth. Bleach Cleanable: 1:4 household bleach to water solution. Thoroughly rinse all solution residue with clean water and air dry.

Sustainability

Prop 65 Compliant
No FR Additives – AB2998 Compliant
No Antimicrobial / Antibacterial Additives
PFAS Free
Heavy Metal Free
BPA Free / Tris Free / Formaldehyde Free
REACH Compliant
HHI Compliant

View additional colorways and the complete collection at braytontextiles.com

BRAYTON | TEXTILES

Jilly Twill

JT01 Grape

JT03 Pea Pod

JT04 Black

JT05 Silver Birch

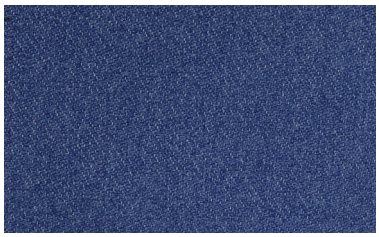

JT06 Bluebird

JT08 Alpine

JT10 Dill

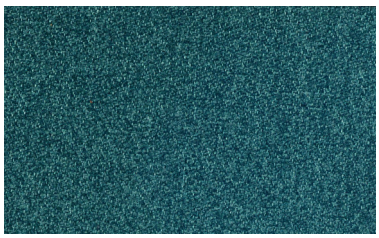

JT12 Laguna

JT15 Dark Granite

JT17 Medium Gray

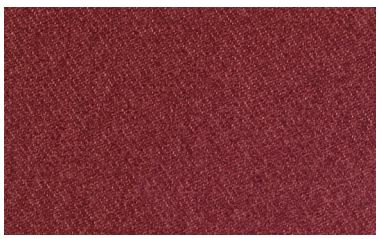

JT18 Ruby Red

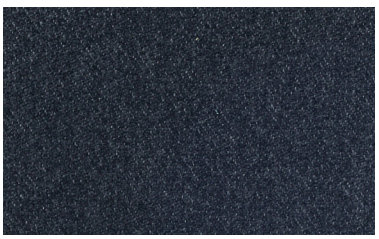

JT20 Bleu

JT24 Gray-Taupe

BRAYTON | TEXTILES

Jilly Twill

General Specifications

Composition:	100% Polyester
Finish:	Resilience TX Stain Repellent (PFAS Free)
Backing:	SBR
Width:	54"
Weight:	15.6 ounces/linear yard
Repeat:	None
Pattern Direction:	Non-Directional

Performance Characteristics

Abrasion Resistance:	100,000+ Double Rubs (Wyzenbeek)* (ASTM D4157)
Tear Strength:	Warp: 28.0 lbs. / Fill: 12.7 lbs. (ASTM D2261-13)
Breaking Strength:	Warp: 334 lbs. / Fill: 109 lbs. (ASTM D5034-09)
Seam Slippage:	Warp: 96.7 lbs. / Fill: 120.6 lbs. (ASTM D4034-92)
Crocking Resistance:	Dry: Class 4.5 / Wet: Class 5.0 (AATCC 8)
Colorfastness to Light:	Class: 4.5 / 40 hours (AATCC 16.3)

ACT® Registered Certification Marks

**Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance.*

Note: Dye lots may vary slightly.

Flammability Specifications

CAL TB 117-2013 - Pass | UFAC Class 1 | NFPA 260 Class 1

Cleaning & Care

W/S, Regular vacuuming is recommended. Spot clean the soiled area with mild soap and water, then wipe or rinse with fresh water and pat dry with a lint-free cloth.

Sustainability

Prop 65 Compliant
No FR Additives – AB2998 Compliant
No Antimicrobial / Antibacterial Additives
PFAS Free
Heavy Metal Free
BPA Free / Tris Free / Formaldehyde Free
Does Not Contain Conflict Minerals
REACH Compliant
ROHS Compliant
HHI / Greenhealth Compliant

View additional colorways and the complete collection at braytontextiles.com

BRAYTON | TEXTILES

Killian

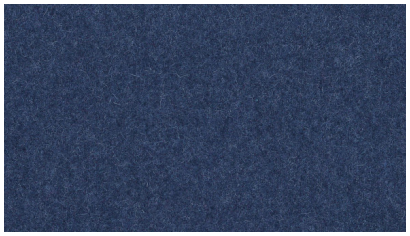

KN01 Sapphire

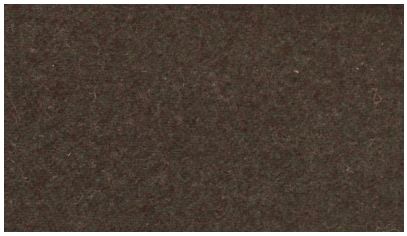

KN05 Walnut

KN09 Blackberry

KN10 Castlerock

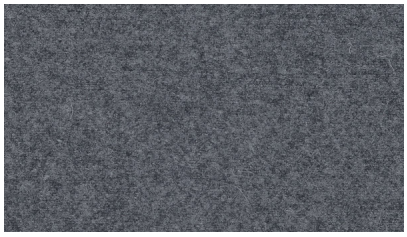

KN11 Storm Cloud

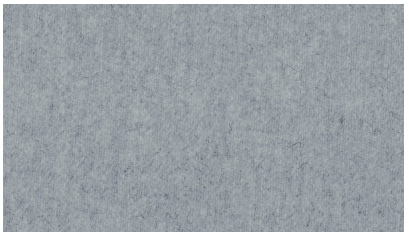

KN13 Light Ash

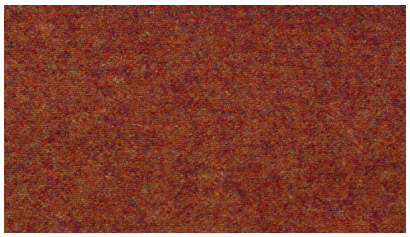

KN14 Autumn

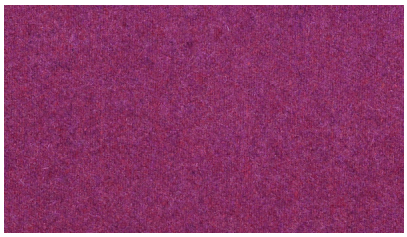

KN15 Fuschia

KN16 Pear

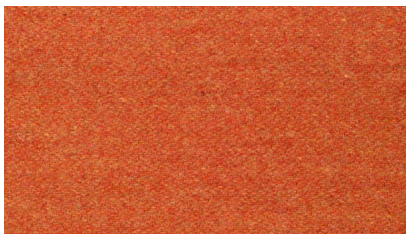

KN20 Carrot

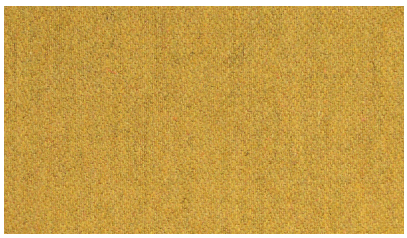

KN23 Honeycomb

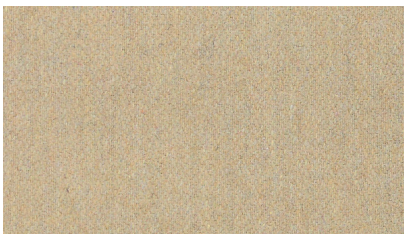

KN25 Buff

KN26 Steel Wool

KN27 Jade

KN28 Blue Topaz

BRAYTON | TEXTILES

Killian

General Specifications

Composition:	70% Wool | 20% Polyester | 5% Acrylic | 5% Nylon
Application:	Heavy Duty Upholstery
Width:	54"
Weight:	16.5 ounces/linear yard
Repeat:	None
Pattern Direction:	Non-Directional

Performance Characteristics

Abrasion Resistance:	100,000+ Rubs (Martindale)* (ASTM D4966)
Tear Strength:	Warp: 61.1 lbs. / Fill: 41.6 lbs. (ASTM D2261-13)
Breaking Strength:	Warp: 108.4 lbs. / Fill: 76.2 lbs. (ASTM D5034-09)
Seam Slippage:	Warp: 61.1 lbs. / Fill: 41.6 lbs. (ASTM D4034-92)
Crocking Resistance:	Dry: Class 5.0 / Wet: Class 4.0 (AATCC 8)
Colorfastness to Light:	Class: 4.0 / 40 hours (AATCC 16.3)

ACT® Registered Certification Marks

**Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance.*

Note: Dye lots may vary slightly.

Flammability Specifications

CAL TB 117-2013 - Pass | UFAC Class 1 | NFPA 260 Class 1

Cleaning & Care

W/S, Treat stains immediately by blotting (avoid any rubbing motion) with a dry or slightly damp cloth. Avoid soaking the area.
For difficult stains, consult a professional cleaning company.

Sustainability

Prop 65 Compliant
No FR Additives – AB2998 Compliant
No Antimicrobial / Antibacterial Additives
PFAS Free
Heavy Metal Free
BPA Free / Tris Free / Formaldehyde Free
Does Not Contain Conflict Minerals
REACH Compliant
ROHS Compliant
HHI Compliant

View additional colorways and the complete collection at braytontextiles.com

BRAYTON | TEXTILES

Nimbus

NM-20 Sealskin

NM-21 Lime

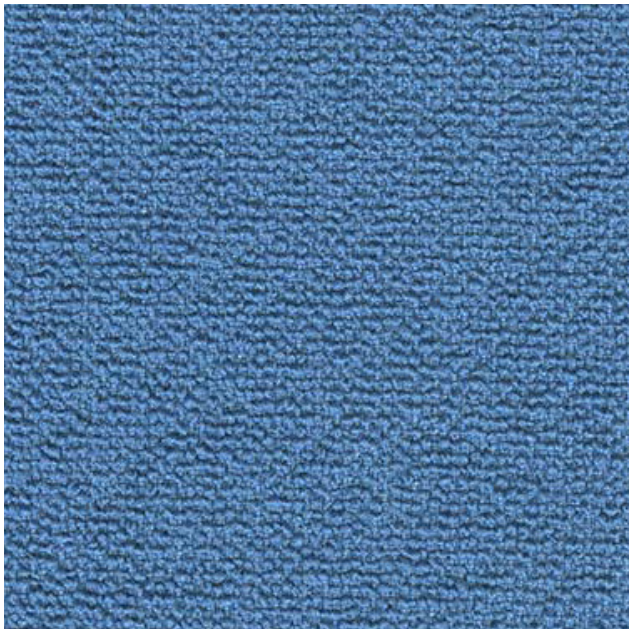

NM-40 Cancun

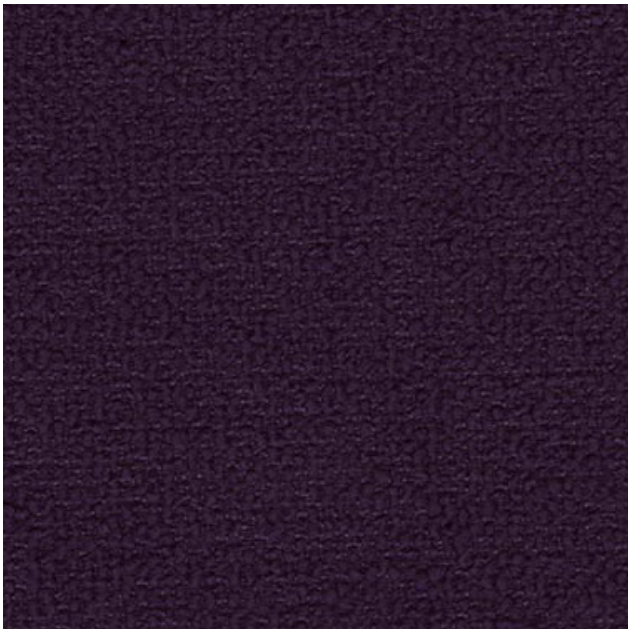

NM-70 Baroness

Nimbus

CONTENT:	100% Post-Consumer Recycled Polyester
FINISH:	GreenShield with light acrylic backing
WIDTH: 54"	**REPEAT:** None
PATTERN DIRECTION:	Shown up the roll
APPLICATION:	Heavy Duty Upholstery
DURABILITY:	250,000+ double rubs
FLAMMABILITY CLASSIFICATION:	California Technical Bulletin 117 : 2013
CLEANING CODE:	W / S
ECO-FEATURES:	100% Recycled Content. Eco-Conscious Manufacturing. GreenShield Finish.

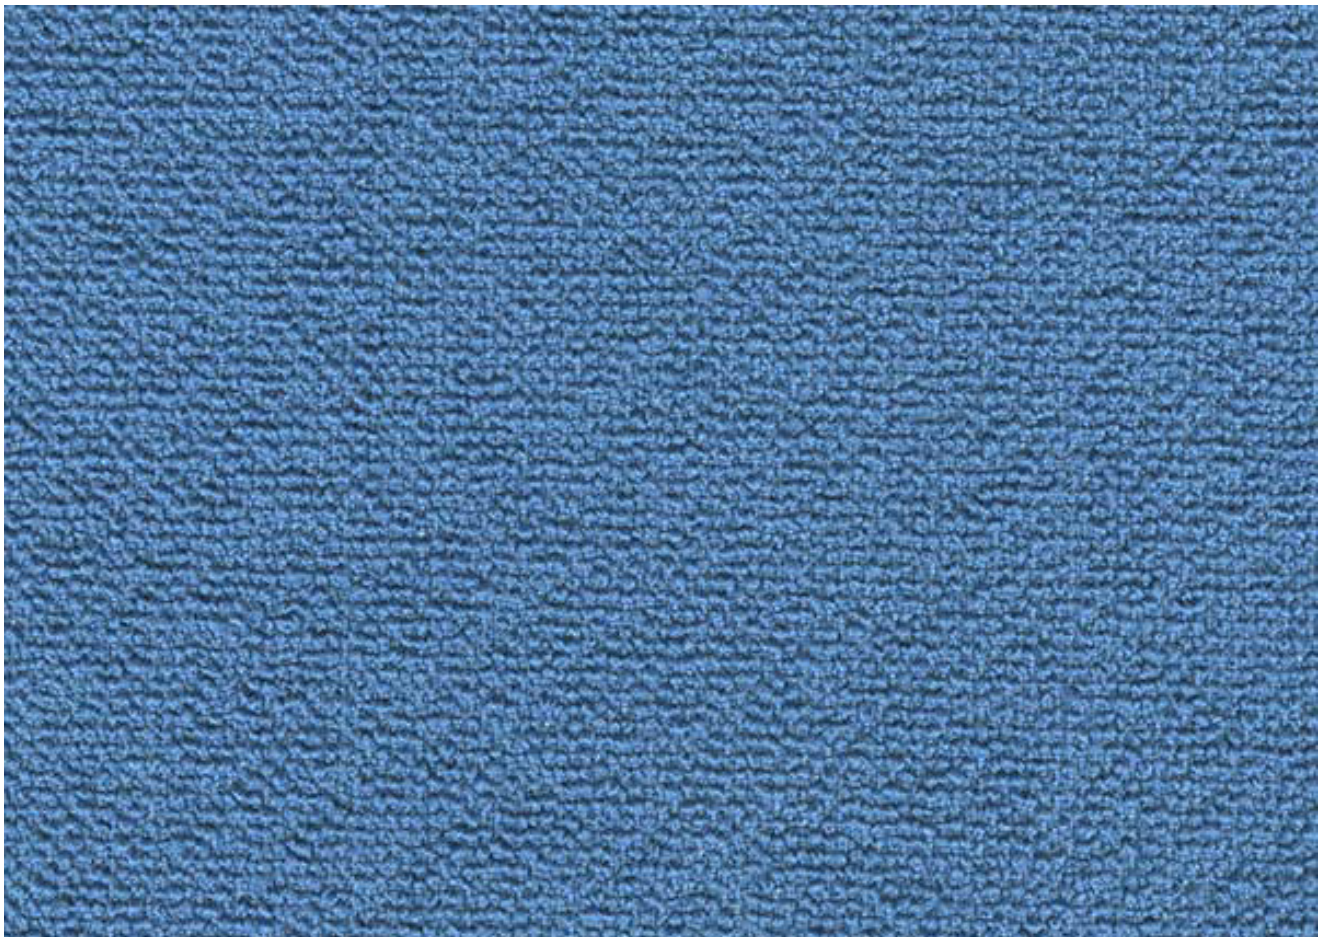

Pebble

PE01 Marble

PE02 Shale

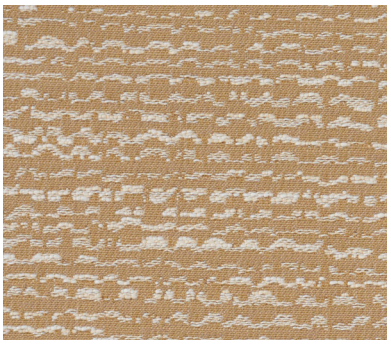

PE03 Flint

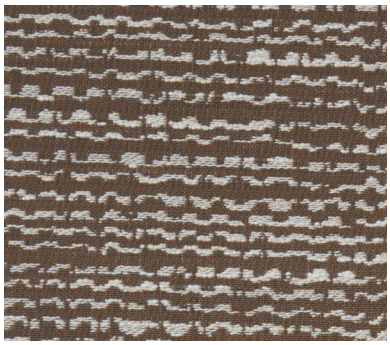

PE04 Granite

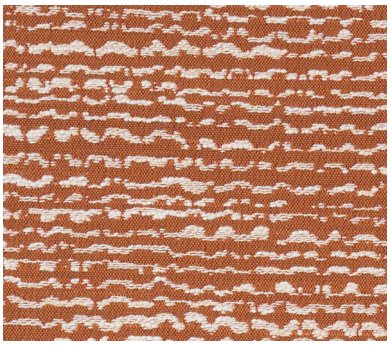

PE05 Tiger's Eye

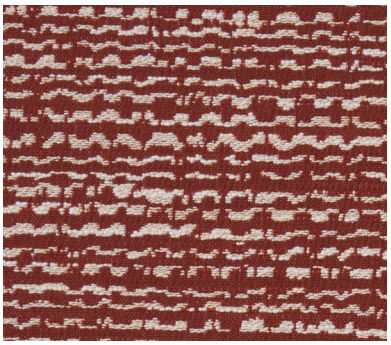

PE06 Sunstone

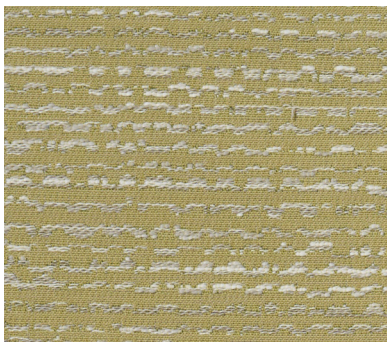

PE07 Green Opal

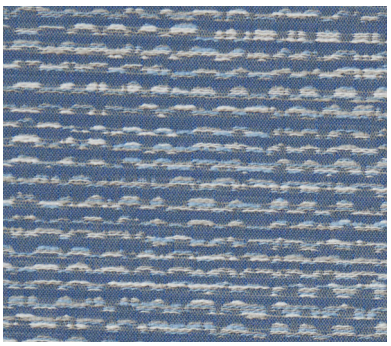

PE08 Topaz

PE11 Sandstone

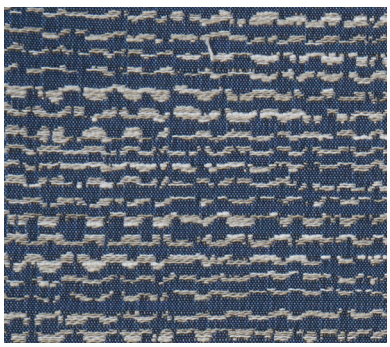

PE09 Lapis

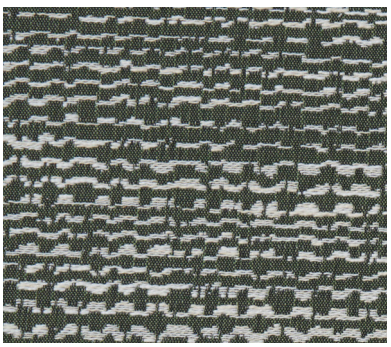

PE10 Moonstone

BRAYTON
PAUL BRAYTON DESIGNS

Pebble

Content:
73% Post Consumer Polyester,
27% Nylon

Finish:
Defend Free water repellent

Backing: Light Acrylic

Grade: 4

Width:
55”

Weight:
17.89 oz / LY

Country Of Origin:
USA

Repeat:
18.5" V x 9.5" H

Pattern Direction:
Up the Roll

Abrasion:
100,000 double rubs, Wyzenbeek*

Cleaning Code:
WSB

Bleach Cleanable:
10:1 Water:Bleach

Breaking Strength:
ASTM-D5034-21
Pass

Cal 117 2013:
Pass

Environmental Benefits:
PFAS Free, No added Flame Retardant chemicals, No added anti-bacterial / anti-microbial chemicals, Lead free, Heavy metal free, Formaldehyde free, BPA free

Certificates & Standards:
Healthier Hospitals Compliant

Flammability Notes:
FR Free

ACT Symbols:

**Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.*

***ACT® Registered Certification Marks*

Plaid Perfect

PL01 Granite

PL02 Ivory

PL03 Bisque

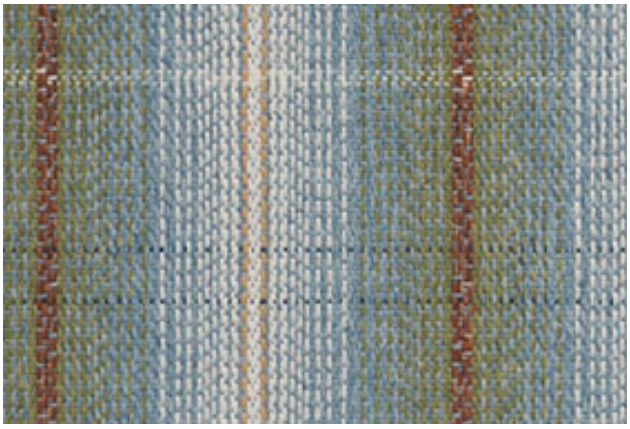

PL04 Horizon

PL05 Blue

BRAYTON | TEXTILES

Plaid Perfect

General Specifications

Composition:	77% Post-Consumer Polyester, 23% Virgin Polyester
Finish:	Water-Based Stain Repellent (PFAS Free)
Backing:	Latex-Acrylic
Width:	54"
Weight:	14.4 ounces/linear yard
Repeat:	3.6" V, x 3.6" H
Pattern Direction:	Railroaded
Country of Origin:	USA

Performance Characteristics

Abrasion Resistance:	100,000+ Double Rubs (Wyzenbeek)* (ASTM D4157)
Brush Pilling:	Class 4.5 (ASTM D-3511)
Breaking Strength:	Warp: 138.2 lbs. / Fill: 227.3 lbs. (ASTM D5034-21)
Seam Slippage:	Warp: 50 lbs. / Fill: 50 lbs. (ASTM D4034-19)
Crocking Resistance:	Dry: Class 5.0 / Wet: Class 5.0 (AATCC 8)
Colorfastness to Light:	Class 5.0 / 40 Hours (AATCC 16.3)

ACT® Registered Certification Marks

**Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance.*

Note: Dye lots may vary slightly.

Flammability Specifications

CAL TB 117-2013 - Pass | UFAC Class 1

Cleaning & Care

W / S / B, Regular vacuuming is recommended. Clean stains with mild soap and water, blot with a clean white cloth or paper towel, and allow fabric to air dry.
Bleach Cleanable: 1:16 household bleach to water solution. Thoroughly rinse all solution residue with clean water and air dry.

Sustainability

Recycled Fiber Content
Prop 65 Compliant
No FR Additives – AB2998 Compliant
No Antimicrobial / Antibacterial Additives
PFAS Free
Heavy Metal Free
BPA Free / Tris Free / Formaldehyde Free
REACH Compliant
HHI Compliant

View additional colorways and the complete collection at braytontextiles.com

BRAYTON | TEXTILES

Rhyme

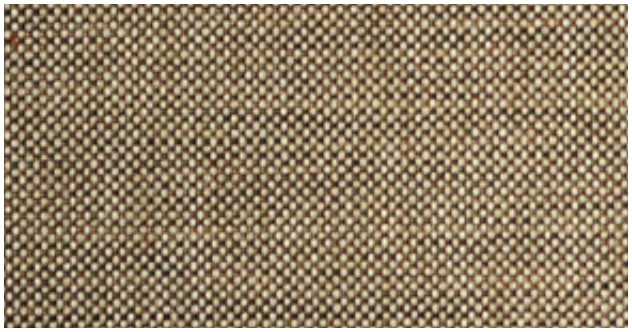

RY01 Castaway

RY02 Wild Wood

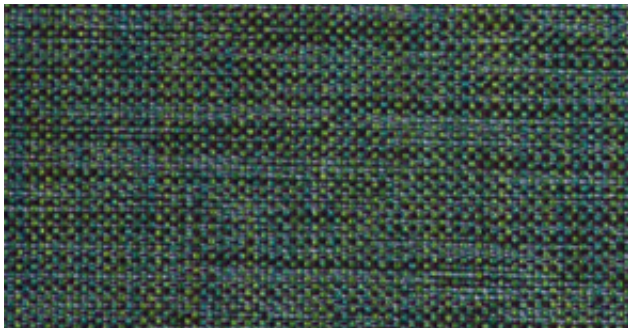

RY07 Blue Bayou

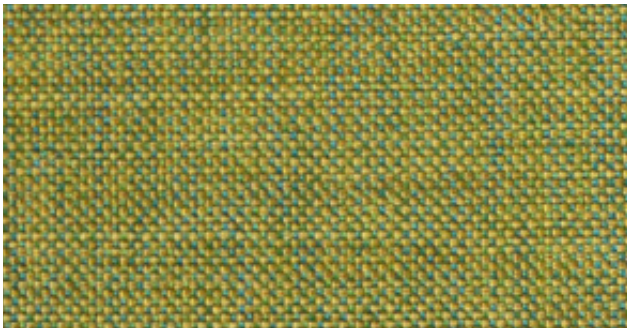

RY09 Margarita

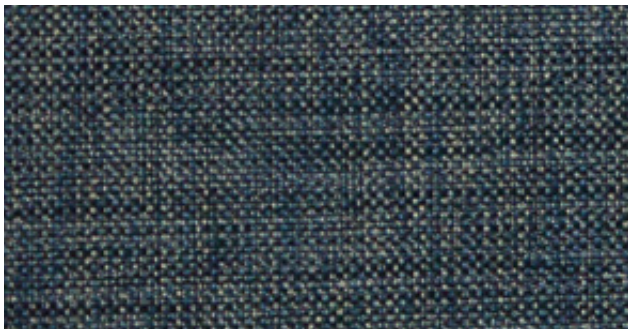

RY11 Bell Bottom

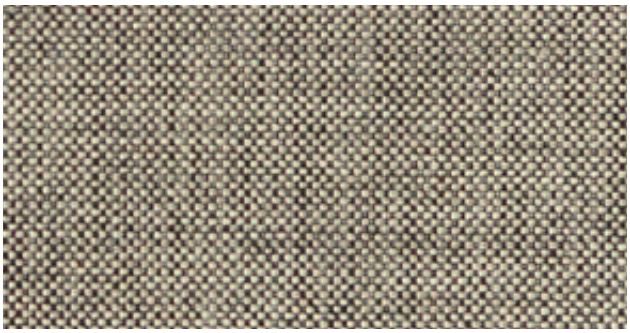

RY14 Cottage Side

RY16 Moon Shadow

RY18 Cajun Kick

BRAYTON | TEXTILES

Rhyme

General Specifications

Composition:	100% Polyester
Finish:	Resilience TX Stain Repellent (PFAS Free)
Backing:	SBR
Width:	54"
Weight:	18.8 ounces/linear yard
Repeat:	None
Pattern Direction:	Non-Directional
Country of Origin:	China

Performance Characteristics

Abrasion Resistance:	100,000+ Double Rubs (Wyzenbeek)* (ASTM D4157)
Tear Strength:	Warp: 59.3 lbs. / Fill: 56.6 lbs. (ASTM D2261-13)
Breaking Strength:	Warp: 192 lbs. / Fill: 226 lbs. (ASTM D5034-09)
Seam Slippage:	Warp: 88.6 lbs. / Fill: 82.4 lbs. (ASTM D4034-92)
Crocking Resistance:	Dry: Class 4.5 / Wet: Class 5.0 (AATCC 8)
Colorfastness to Light:	Class 4.5 / 40 Hours (AATCC 16.3)

ACT® Registered Certification Marks

**Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance.*

Note: Dye lots may vary slightly.

Flammability Specifications

CAL TB 117-2013 - Pass | UFAC Class 1 | NFPA 260 Class 1

Cleaning & Care

W/S, Regular vacuuming is recommended. Spot clean the soiled area with mild soap and water, then wipe or rinse with fresh water and pat dry with a lint-free cloth.

Sustainability

Prop 65 Compliant
No FR Additives – AB2998 Compliant
No Antimicrobial / Antibacterial Additives
PFAS Free
Heavy Metal Free
BPA Free / Tris Free / Formaldehyde Free
Does Not Contain Conflict Minerals
REACH Compliant
ROHS Compliant
HHI / Greenhealth Compliant

View additional colorways and the complete collection at braytontextiles.com

BRAYTON | TEXTILES

Tally

TA01 Harvest

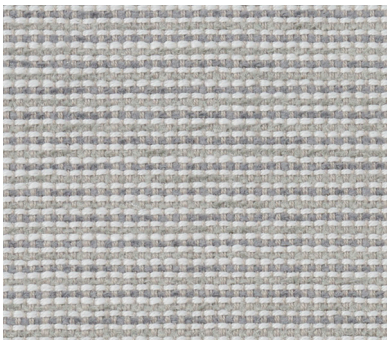

TA02 Dusty

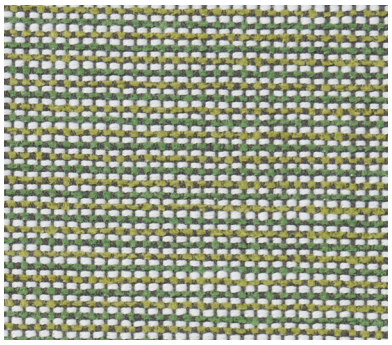

TA03 Pickled

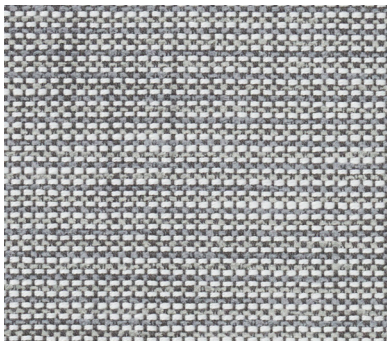

TA04 Aluminum

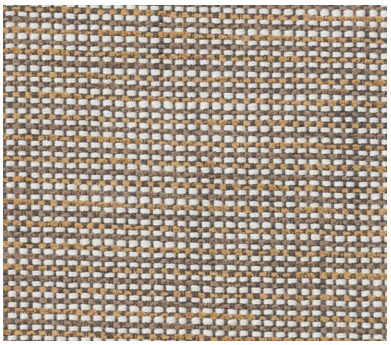

TA05 Autumn

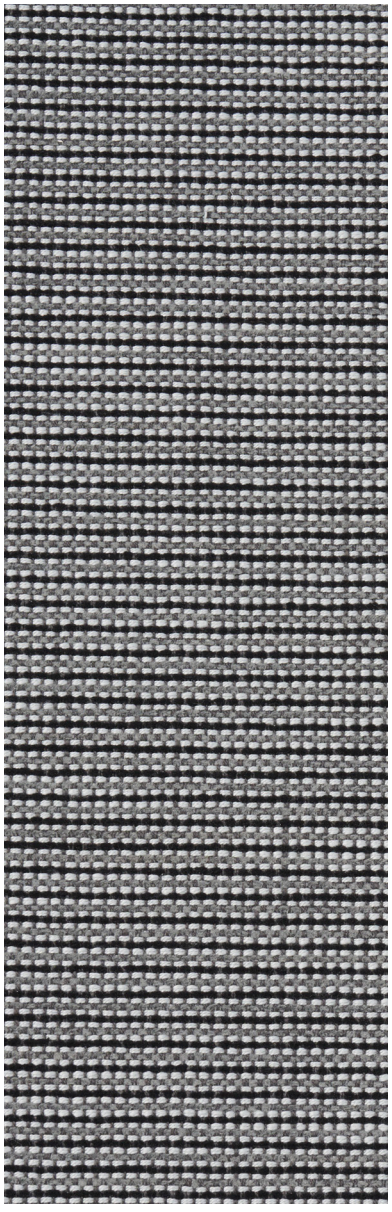

TA10 Chestnut

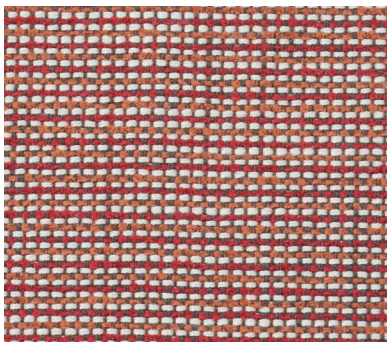

TA06 Sunset

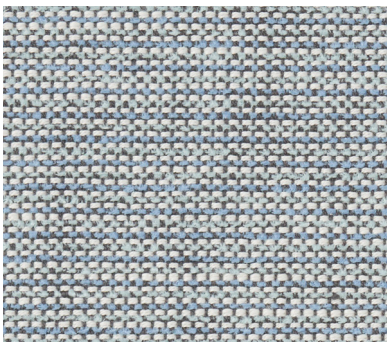

TA07 Summer Haze

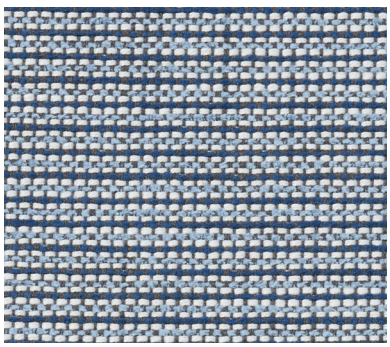

TA08 Bungalow Blue

TA09 Glowing

BRAYTON
PAUL BRAYTON DESIGNS

Tally

Content:
95.04% polyester, 4.96% Olefin

Finish:
Eco Ease water repellent with standard backing

Grade: 3

Width:
55”

Weight:
19.984 oz / LY

Backing:
Light Acrylic

Country Of Origin:
USA

Repeat:
.25” V x 0.125" H

Pattern Direction:
Up the Roll

Abrasion:
100,000 double rubs, Wyzenbeek*

Cleaning Code:
W / S

Breaking Strength:
ASTM-D5034-90
Pass

Cal 117 2013:
Pass

Environmental Benefits:
PFAS Free, No added Flame Retardant chemicals, Mildew Resistant, No added anti-bacterial / anti-microbial chemicals,Lead free, Heavy metal free, Formaldehyde free, BPA free

Certificates & Standards:
Greenguard Certified
Healthier Hospitals Compliant

Flammability Notes:
FR Free

ACT Symbols:

**Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.*

***ACT® Registered Certification Marks*

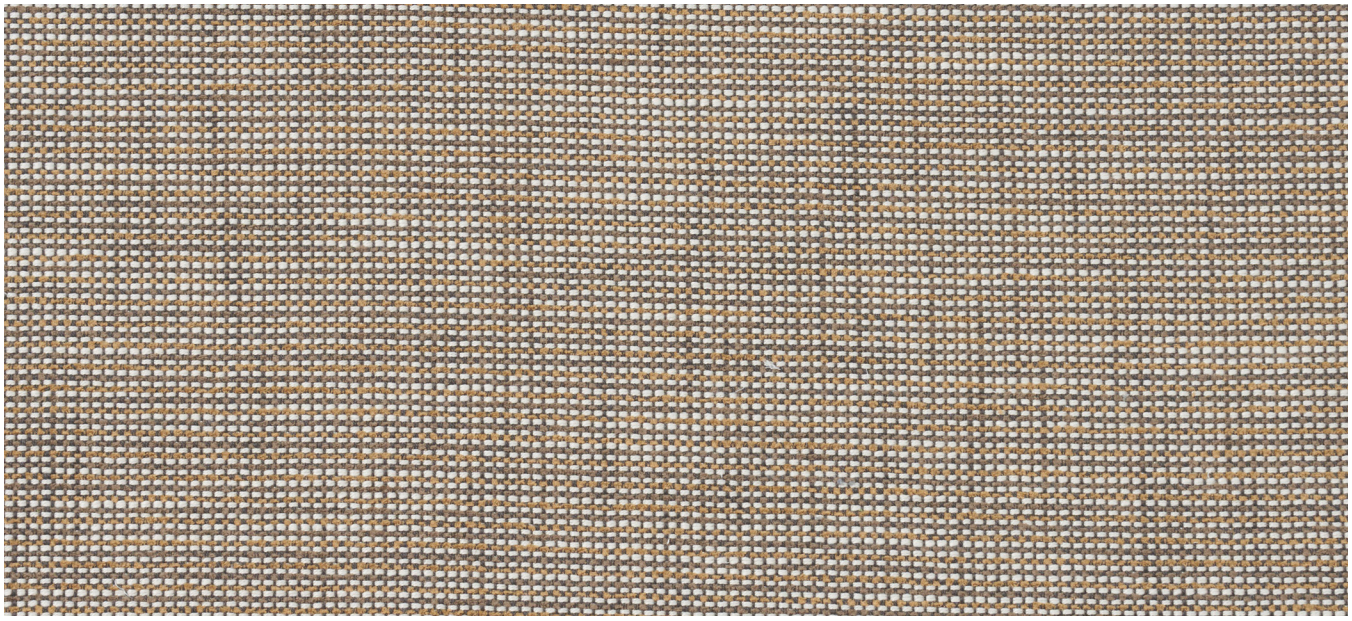

Tulip

Escape TU-01

Honeybee TU-02

Teal TU-04

Red Hot TU-05

Tulip

DESIGN:	Paul Brayton Designs Exclusive
CONTENT:	74% Polyester (16% Post Consumer) & 26% Nylon
FINISH:	DEFEND® Free water repellent finish (free of fluorochemicals)
BACKING:	Light Acrylic
WIDTH: 54"	**REPEAT:** 9" V x 9" H
PATTERN DIRECTION:	Shown up the roll
APPLICATION:	Heavy Duty Upholstery
DURABILITY:	100,000+ Double Rubs - Wyzenbeek
FLAMMABILITY CLASS:	California Technical Bulletin 117: 2013. UFAC, Class 1. NFPA-260, Class 1
CLEANING CODE:	W / S

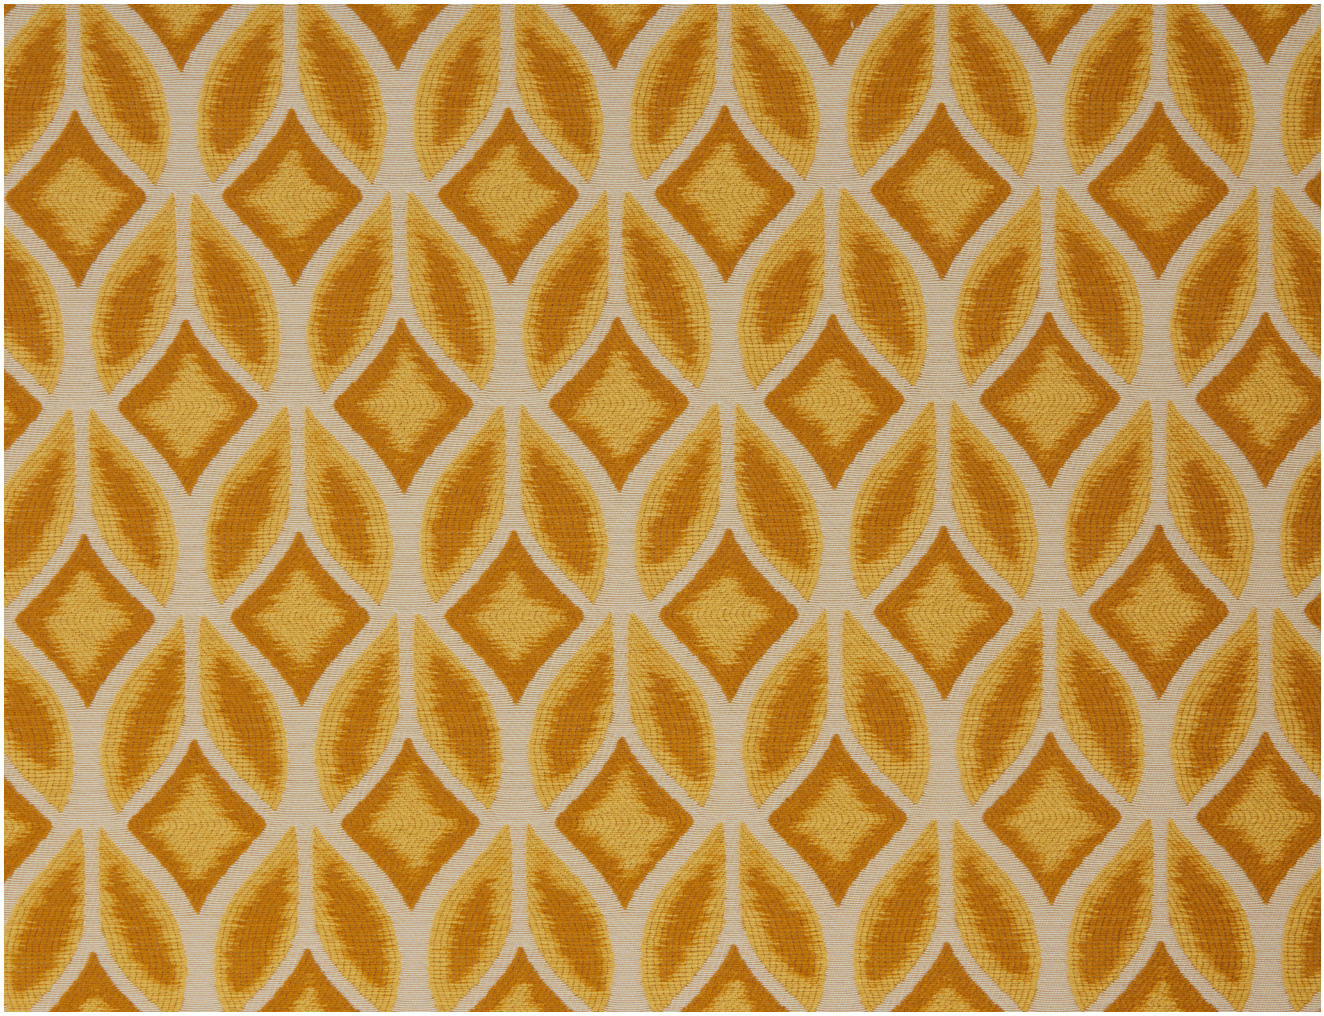

Walden

SUPREEN®
The fabric that keeps liquid out and beauty in

WL01 Beach

WL02 Dragonfly

WL03 Sandy Swan

WL04 Lily Pad

WL05 Inlet

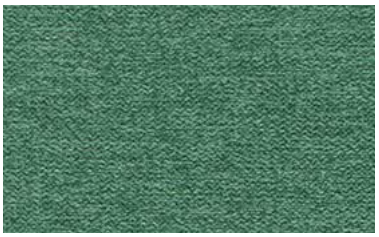

WL06 Marsh

WL07 Gravel Path

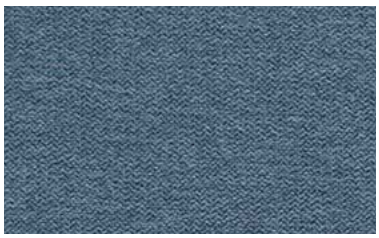

WL08 Misty

WL09 Silver Cove

WL10 Drift

WL11 Anchor Slate

WL12 Breezy

WL13 Coast

BRAYTON | TEXTILES

Walden

SUPREEN®
The fabric that keeps liquid out and beauty in

General Specifications

Composition:	89% polyester | 9% polyurethane | 2% Silicone
Finish:	SUPREEN™ Stain Repellent (Silicone Based, PFAS Free)
Backing:	SUPREEN® Liquid Barrier (Polyurethane)
Width:	54"
Weight:	14.9 ounces/linear yard
Repeat:	None
Pattern Direction:	Non-Directional
Country of Origin:	China

Performance Characteristics

Abrasion Resistance:	100,000+ Double Rubs (Wyzenbeek)* (ASTM D4157)
Tear Strength:	Warp: 21.4 lbs. / Fill: 10.2 lbs. (ASTM D2261-13)
Breaking Strength:	Warp: 249 lbs. / Fill: 79 lbs. (ASTM D5034-09)
Seam Slippage:	Warp: 94.0 lbs. / Fill: 83.5 lbs. (ASTM D4034-92)
Crocking Resistance:	Dry: Class 5.0 / Wet: Class 5.0 (AATCC 8)
Colorfastness to Light:	Class 5.0 / 40 Hours (AATCC 16.3)

ACT® Registered Certification Marks

**Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance.*

Note: Dye lots may vary slightly.

Flammability Specifications

CAL TB 117-2013 - Pass | UFAC 260 Class 1 | NFPA Class 1

Cleaning & Care

W/S/B, Regular vacuuming is recommended. Spot clean the soiled area with mild soap and water, then wipe or rinse with fresh water.
Bleach Cleanable: 1:10 household bleach to water solution.

Sustainability

Prop 65 Compliant
No FR Additives – AB2998 Compliant
No Antimicrobial / Antibacterial Additives
PFAS Free
Heavy Metal Free
BPA Free / Tris Free / Formaldehyde Free
Does Not Contain Conflict Minerals
REACH Compliant
ROHS Compliant
HHI / Greenhealth Compliant

View additional colorways and the complete collection at braytontextiles.com

BRAYTON | TEXTILES

Woodland

WD-01 Frost

WD-03 Sky

WD-02 Mist

WD-04 Gem

BRAYTON
PAUL BRAYTON DESIGNS

Woodland

DESIGN:	Paul Brayton Designs Exclusive
CONTENT:	77% Post Consumer Polyester and 23% Nylon
FINISH:	DEFEND® Free water repellent finish (free of fluorochemicals)
BACKING:	Light Acrylic
WIDTH: 55"	**REPEAT:** 27.5" H x 27.75" V
PATTERN DIRECTION:	Shown up the roll
APPLICATION:	Heavy Duty Upholstery
DURABILITY:	100,000+ Double Rubs - Wyzenbeek
FLAMMABILITY CLASS:	1. California Technical Bulletin 117 : 2013.
CLEANING CODE:	W/S/BC 4:1 Water to Bleach Solution

ALMOST®
DESIGN FOR LIVING

The highest performing faux leather on the market

ALMOST® is manufactured using 100% microscopic nylon fibers that are entangled, like the fibers in collagen. This construction creates a breathable material that is comfortable in all temperatures, beautiful in appearance and feels natural.

The colors and textures are integrated with heat and pressure, directly into the base structure, creating a surface that will never delaminate. ALMOST® is not made of two layers bonded together, but one single ply. It is also highly resistant to cracking, tearing, puncture and fading.

- Exceeds 250,000 Double Rubs
- 10-year Warranty
- Hydrolysis: 10+ Weeks
- Stain Resistant
- Bleach Cleanable (except Suede)
- Liquid impermeable
- FR Free

BRAYTON
PAUL BRAYTON DESIGNS

ALMOST®
DESIGN FOR LIVING

The highest performing faux leather on the market

CUSTOM COLOR MATCH

ALMOST® faux leather can be customized to fit any design or aesthetic, making it the perfect choice for your interior design.

Elevate your brand and custom color match any ALMOST pattern to a Pantone number or swatch of your choice.

CLICK TO GET STARTED

EMBOSS FOR EXTRA EFFECT

Create rich textures and dramatically transform the impact of your interior.

CLICK TO GET STARTED

All of the ALMOST® products in this binder can be customized.

ALMOST®
DESIGN FOR LIVING

AM20 Dover


AM22 Pinot

AM23 Stormy Blue

AM24 Iron

AM25 Bayside Blue

AM39 Smoke

AM41 Honey

AM46 Putty

AM47 Mushroom

AM48 Greige

AM52 Bluestone

AM56 Brazil


AM57 Morel

AM60 White

AM61 Vanilla


AM62 River Rock

AM80 Cameo

AM81 Oyster Grey

AM83 Taupe


AM85 Chestnut

AM87 Indigo

AM88 Bone

AM89 Jet Black

AM90 Snow


AM92 Bordeaux

AM93 Hunter Green

AM98 Oxford Brown

BRAYTON | TEXTILES

ALMOST®
DESIGN FOR LIVING

General Specifications

Composition:	100% Nylon Fiber Matrix
Application:	Heavy Duty Upholstery
Width:	54"
Weight:	13.2 ounces/linear yard
Repeat:	None
Pattern Direction:	Non-Directional

Performance Characteristics

Abrasion Resistance:	250,000+ Double Rubs (Wyzenbeek)* (ASTM D4157)
Hydrolysis:	10 Weeks (ISO 1419:1995)
Tear Strength:	Warp: 30 lbs. min. / Fill: 30 lbs. min. (ASTM D6077-16)
Breaking Strength:	Warp: 100 lbs. min. / Fill: 100 lbs. min. (ASTM D5034)
Seam Strength:	Warp: 100 lbs. min / Fill: 100 lbs. min (ASTM D1683)
Crocking Resistance:	Dry: Class 5 / Wet: Class 5 (AATCC 8)
Colorfastness to Light:	Class 5 / 100 Hours (AATCC 16.3)

ACT® Registered Certification Marks

**Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance.*

Note: Dye lots may vary slightly.

Flammability Specifications

CAL TB 117-2013 - Pass | UFAC Class 1 | NFPA 260 Class 1 | ASTM E84*

*Tested as Almost with sheeting backing by adhered method.

Cleaning & Care

W/S/B, Wipe with a mild soap and water solution using a soft clean cloth or sponge. Avoid cleaners containing abrasives. Rinse with clean water, dry with a soft cloth or towel.

Bleach Cleanable: 1:10 household bleach to water solution. Thoroughly rinse all solution residue with clean water and air dry.

Sustainability

Prop 65 Compliant
No FR Additives – AB2998 Compliant
No Antimicrobial / Antibacterial Additives
PFAS Free
Heavy Metal Free
BPA Free / Tris Free / Formaldehyde Free
REACH Compliant
HHI Compliant

View additional colorways and the complete collection at braytontextiles.com

BRAYTON | TEXTILES

ALMOST® Asheville

ALMOST®
DESIGN FOR LIVING

ASV001 Blue Ridge

ASV002 Flaxen

ASV003 Auburn

ASV004 Amber

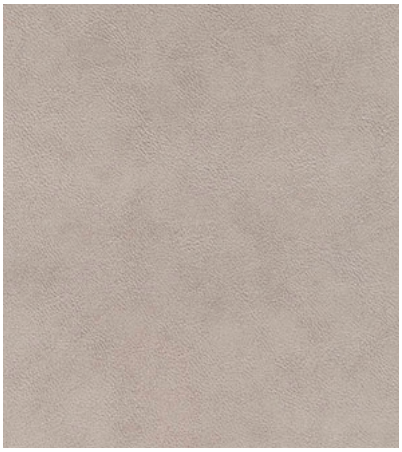

ASV005 Ashe

ASV006 Pebble Pathway

ASV007 Mahogany

ASV008 Forest

ASV009 Smoky Mountain

BRAYTON | TEXTILES

ALMOST® Asheville

ALMOST®
DESIGN FOR LIVING

General Specifications

Composition:	100% Nylon Fiber Matrix
Application:	Heavy Duty Upholstery
Width:	54"
Weight:	15.0 ounces/linear yard
Repeat:	None
Pattern Direction:	Non-Directional

Performance Characteristics

Abrasion Resistance:	250,000+ Double Rubs (Wyzenbeek)* (ASTM D4157)
Hydrolysis:	10 Weeks (ISO 1419:1995)
Tear Strength:	Warp: 30 lbs. min. / Fill: 30 lbs. min. (ASTM D6077-16)
Breaking Strength:	Warp: 100 lbs. min. / Fill: 100 lbs. min. (ASTM D5034)
Seam Strength:	Warp: 100 lbs. min / Fill: 100 lbs. min (ASTM D1683)
Crocking Resistance:	Dry: Class 5 / Wet: Class 5 (AATCC 8)
Colorfastness to Light:	Class 5 / 100 Hours (AATCC 16.3)

ACT® Registered Certification Marks

**Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance.*

Note: Dye lots may vary slightly.

Flammability Specifications

CAL TB 117-2013 - Pass | UFAC Class 1 | NFPA 260 Class 1 | ASTM E84*

*Tested as Almost with sheeting backing by adhered method.

Cleaning & Care

W/S/B, Wipe with a mild soap and water solution using a soft clean cloth or sponge. Avoid cleaners containing abrasives. Rinse with clean water, dry with a soft cloth or towel.

Bleach Cleanable: 1:10 household bleach to water solution. Thoroughly rinse all solution residue with clean water and air dry.

Sustainability

Prop 65 Compliant
No FR Additives – AB2998 Compliant
No Antimicrobial / Antibacterial Additives
PFAS Free
Heavy Metal Free
BPA Free / Tris Free / Formaldehyde Free
REACH Compliant
HHI Compliant

View additional colorways and the complete collection at braytontextiles.com

BRAYTON | TEXTILES

ALMOST® Avante

ALMOST®
DESIGN FOR LIVING

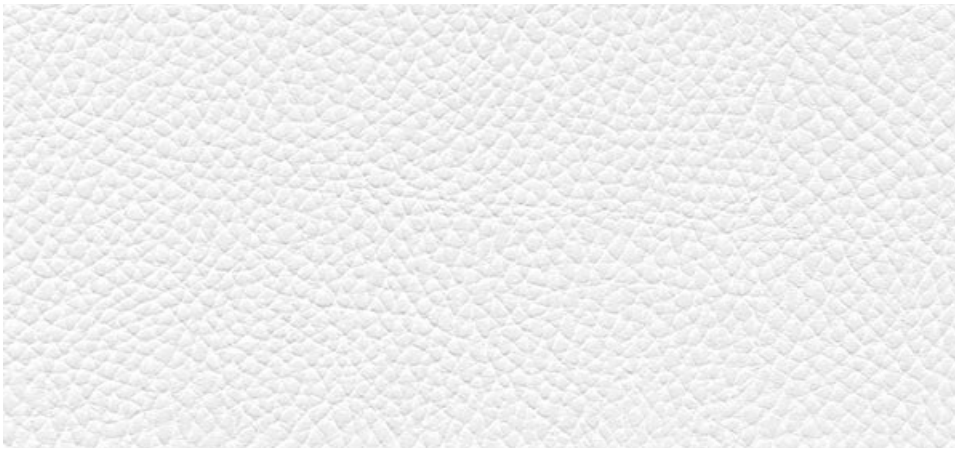

AAV101 Bright White

AAV102 Cream

AAV103 Atlantic Sand

AAV104 Sand Castle

AAV105 Porcini

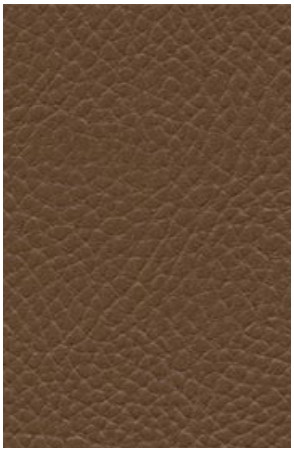

AAV106 Sorrell

AAV108 Molten Chocolate

AAV109 Elephant

AAV110 Navy Marine

AAV111 Pitch

BRAYTON | TEXTILES

ALMOST® Avante

ALMOST®
DESIGN FOR LIVING

General Specifications

Composition:	100% Nylon Fiber Matrix
Application:	Heavy Duty Upholstery
Width:	54"
Weight:	18.3 ounces/linear yard
Repeat:	None
Pattern Direction:	Non-Directional

Performance Characteristics

Abrasion Resistance:	250,000+ Double Rubs (Wyzenbeek)* (ASTM D4157)
Hydrolysis:	10 Weeks (ISO 1419:1995)
Tear Strength:	Warp: 30 lbs. min. / Fill: 30 lbs. min. (ASTM D6077-16)
Breaking Strength:	Warp: 100 lbs. min. / Fill: 100 lbs. min. (ASTM D5034)
Seam Strength:	Warp: 100 lbs. min / Fill: 100 lbs. min (ASTM D1683)
Crocking Resistance:	Dry: Class 5 / Wet: Class 5 (AATCC 8)
Colorfastness to Light:	Class 5 / 100 Hours (AATCC 16.3)

ACT® Registered Certification Marks

**Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance.*

Note: Dye lots may vary slightly.

Flammability Specifications

CAL TB 117-2013 - Pass | UFAC Class 1 | NFPA 260 Class 1 | ASTM E84*

*Tested as Almost with sheeting backing by adhered method.

Cleaning & Care

W/S/B, Wipe with a mild soap and water solution using a soft clean cloth or sponge. Avoid cleaners containing abrasives. Rinse with clean water, dry with a soft cloth or towel.

Bleach Cleanable: 1:10 household bleach to water solution. Thoroughly rinse all solution residue with clean water and air dry.

Sustainability

Prop 65 Compliant
No FR Additives – AB2998 Compliant
No Antimicrobial / Antibacterial Additives
PFAS Free
Heavy Metal Free
BPA Free / Tris Free / Formaldehyde Free
REACH Compliant
HHI Compliant

View additional colorways and the complete collection at braytontextiles.com

BRAYTON | TEXTILES

ABR901 Tawny

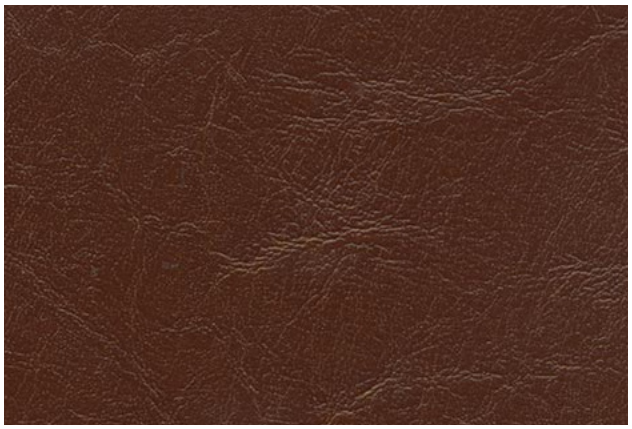

ABR902 Syrup

ABR903 Port

ABR904 Nearly Black

ABR905 French Roast

ALMOST® Barcelona

ALMOST®
DESIGN FOR LIVING

General Specifications

Composition:	100% Nylon Fiber Matrix
Application:	Heavy Duty Upholstery
Width:	54"
Weight:	13.2 ounces/linear yard
Repeat:	None
Pattern Direction:	Non-Directional

Performance Characteristics

Abrasion Resistance:	250,000+ Double Rubs (Wyzenbeek)* (ASTM D4157)
Hydrolysis:	10 Weeks (ISO 1419:1995)
Tear Strength:	Warp: 30 lbs. min. / Fill: 30 lbs. min. (ASTM D6077-16)
Breaking Strength:	Warp: 100 lbs. min. / Fill: 100 lbs. min. (ASTM D5034)
Seam Strength:	Warp: 100 lbs. min / Fill: 100 lbs. min (ASTM D1683)
Crocking Resistance:	Dry: Class 5 / Wet: Class 5 (AATCC 8)
Colorfastness to Light:	Class 5 / 100 Hours (AATCC 16.3)

ACT® Registered Certification Marks

**Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance.*

Note: Dye lots may vary slightly.

Flammability Specifications

CAL TB 117-2013 - Pass | UFAC Class 1 | NFPA 260 Class 1 | ASTM E84*

*Tested as Almost with sheeting backing by adhered method.

Cleaning & Care

W/S/B, Wipe with a mild soap and water solution using a soft clean cloth or sponge. Avoid cleaners containing abrasives. Rinse with clean water, dry with a soft cloth or towel.

Bleach Cleanable: 1:10 household bleach to water solution. Thoroughly rinse all solution residue with clean water and air dry.

Sustainability

Prop 65 Compliant
No FR Additives – AB2998 Compliant
No Antimicrobial / Antibacterial Additives
PFAS Free
Heavy Metal Free
BPA Free / Tris Free / Formaldehyde Free
REACH Compliant
HHI Compliant

View additional colorways and the complete collection at braytontextiles.com

BRAYTON | TEXTILES

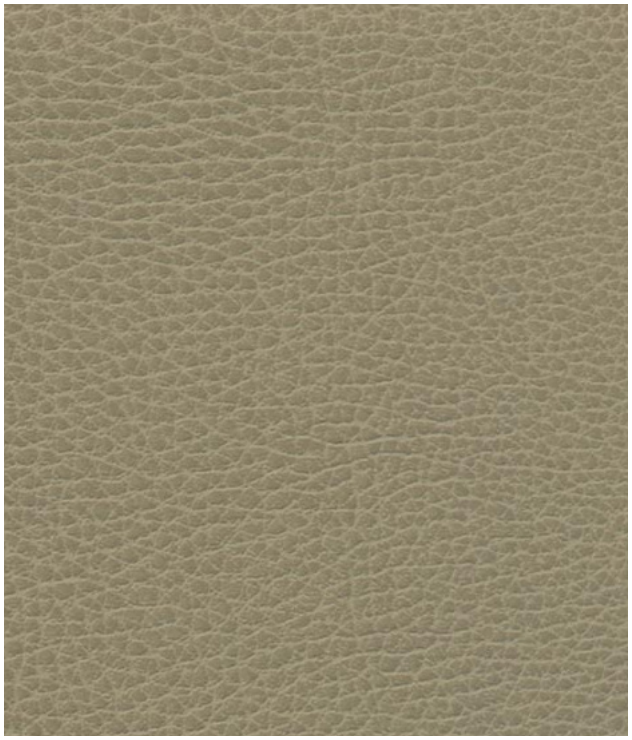

ABF950 Cafe Creme

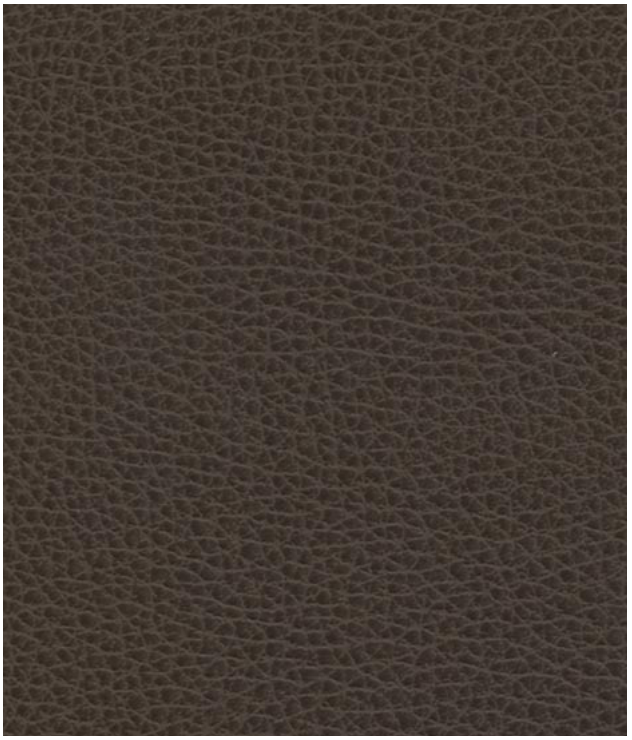

ABF951 Cavern

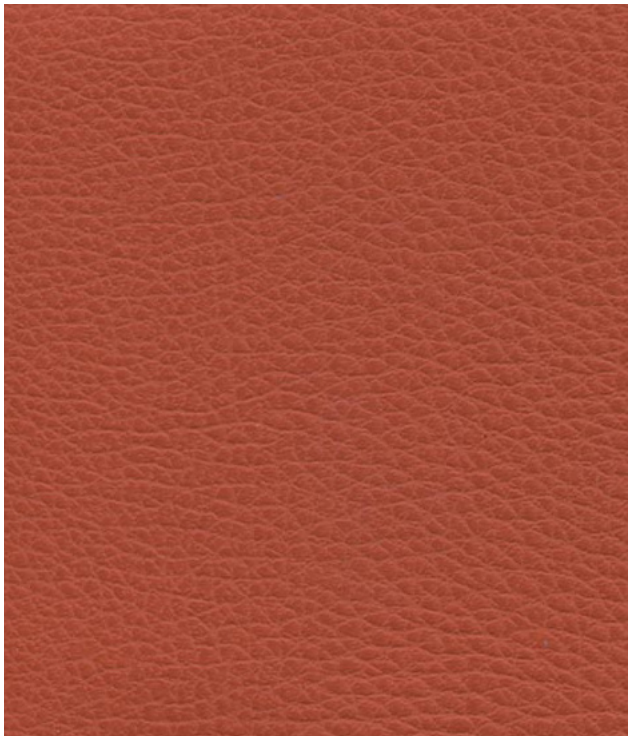

ABF952 Day Lily

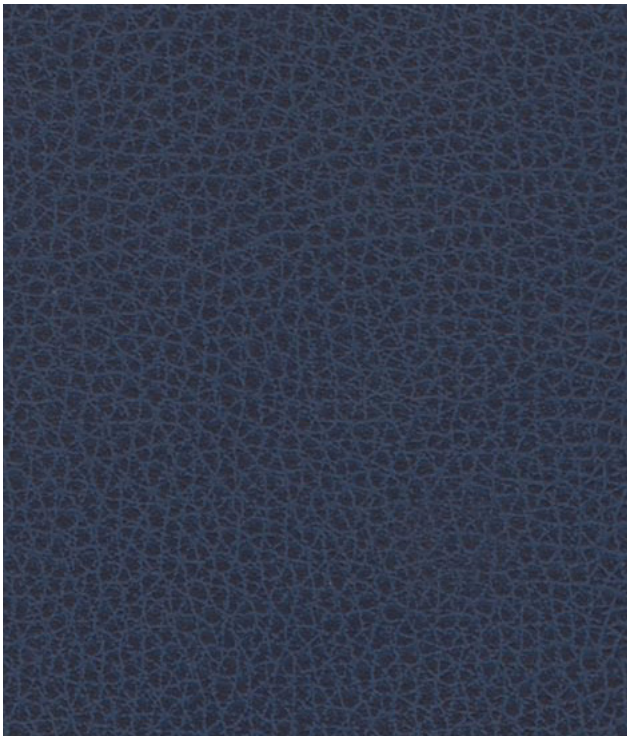

ABF953 Twilight

ALMOST® Buffed

ALMOST®
DESIGN FOR LIVING

General Specifications

Composition:	100% Nylon Fiber Matrix
Application:	Heavy Duty Upholstery
Width:	54"
Weight:	13.2 ounces/linear yard
Repeat:	None
Pattern Direction:	Non-Directional

Performance Characteristics

Abrasion Resistance:	250,000+ Double Rubs (Wyzenbeek)* (ASTM D4157)
Hydrolysis:	10 Weeks (ISO 1419:1995)
Tear Strength:	Warp: 30 lbs. min. / Fill: 30 lbs. min. (ASTM D6077-16)
Breaking Strength:	Warp: 100 lbs. min. / Fill: 100 lbs. min. (ASTM D5034)
Seam Strength:	Warp: 100 lbs. min / Fill: 100 lbs. min (ASTM D1683)
Crocking Resistance:	Dry: Class 5 / Wet: Class 5 (AATCC 8)
Colorfastness to Light:	Class 5 / 100 Hours (AATCC 16.3)

ACT® Registered Certification Marks

**Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance.*

Note: Dye lots may vary slightly.

Flammability Specifications

CAL TB 117-2013 - Pass | UFAC Class 1 | NFPA 260 Class 1 | ASTM E84*

*Tested as Almost with sheeting backing by adhered method.

Cleaning & Care

W/S/B, Wipe with a mild soap and water solution using a soft clean cloth or sponge. Avoid cleaners containing abrasives. Rinse with clean water, dry with a soft cloth or towel.

Bleach Cleanable: 1:10 household bleach to water solution. Thoroughly rinse all solution residue with clean water and air dry.

Sustainability

Prop 65 Compliant
No FR Additives – AB2998 Compliant
No Antimicrobial / Antibacterial Additives
PFAS Free
Heavy Metal Free
BPA Free / Tris Free / Formaldehyde Free
REACH Compliant
HHI Compliant

View additional colorways and the complete collection at braytontextiles.com

BRAYTON | TEXTILES

ALMOST® Calf

ALMOST®
DESIGN FOR LIVING

ACF802 Light Bisque

ACF803 Bisque

ACF805 Straw

ACF806 Khaki

ACF807 Sahara

ACF808 Ginger

ACF809 Spice

ACF813 Smoke

ACF815 Nutbrown

ACF816 Lead

ACF818 Merlot

ACF819 Amethyst

ACF820 Iris

ACF822 Columbine

ACF823 Midnight

ACF824 Blue Spruce

ACF825 Loden

ACF828 Fern Green

ACF829 Seaweed

ACF830 Carbon

ACF833 Buckskin

ACF840 Cinnamon

ACF848 Portabella

BRAYTON | TEXTILES

ALMOST® Calf

ALMOST®
DESIGN FOR LIVING

General Specifications

Composition:	100% Nylon Fiber Matrix
Application:	Heavy Duty Upholstery
Width:	54"
Weight:	13.2 ounces/linear yard
Repeat:	None
Pattern Direction:	Non-Directional

Performance Characteristics

Abrasion Resistance:	250,000+ Double Rubs (Wyzenbeek)* (ASTM D4157)
Hydrolysis:	10 Weeks (ISO 1419:1995)
Tear Strength:	Warp: 30 lbs. min. / Fill: 30 lbs. min. (ASTM D6077-16)
Breaking Strength:	Warp: 100 lbs. min. / Fill: 100 lbs. min. (ASTM D5034)
Seam Strength:	Warp: 100 lbs. min / Fill: 100 lbs. min (ASTM D1683)
Crocking Resistance:	Dry: Class 5 / Wet: Class 5 (AATCC 8)
Colorfastness to Light:	Class 5 / 100 Hours (AATCC 16.3)

ACT® Registered Certification Marks

**Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance.*

Note: Dye lots may vary slightly.

Flammability Specifications

CAL TB 117-2013 - Pass | UFAC Class 1 | NFPA 260 Class 1 | ASTM E84*

*Tested as Almost with sheeting backing by adhered method.

Cleaning & Care

W/S/B, Wipe with a mild soap and water solution using a soft clean cloth or sponge. Avoid cleaners containing abrasives. Rinse with clean water, dry with a soft cloth or towel.

Bleach Cleanable: 1:10 household bleach to water solution. Thoroughly rinse all solution residue with clean water and air dry.

Sustainability

Prop 65 Compliant
No FR Additives – AB2998 Compliant
No Antimicrobial / Antibacterial Additives
PFAS Free
Heavy Metal Free
BPA Free / Tris Free / Formaldehyde Free
REACH Compliant
HHI Compliant

View additional colorways and the complete collection at braytontextiles.com

BRAYTON | TEXTILES

ALMOST® Cambridge

ALMOST®
DESIGN FOR LIVING

ACM201 Log Cabin

ACM202 Pecan

ACM203 Caramel Nut

ACM204 Extra Dark

ACM206 Cool Iron

ACM207 Warm Grey

BRAYTON | TEXTILES

ALMOST® Cambridge

ALMOST®
DESIGN FOR LIVING

General Specifications

Composition:	100% Nylon Fiber Matrix
Application:	Heavy Duty Upholstery
Width:	54"
Weight:	13.2 ounces/linear yard
Repeat:	None
Pattern Direction:	Non-Directional

Performance Characteristics

Abrasion Resistance:	250,000+ Double Rubs (Wyzenbeek)* (ASTM D4157)
Hydrolysis:	10 Weeks (ISO 1419:1995)
Tear Strength:	Warp: 30 lbs. min. / Fill: 30 lbs. min. (ASTM D6077-16)
Breaking Strength:	Warp: 100 lbs. min. / Fill: 100 lbs. min. (ASTM D5034)
Seam Strength:	Warp: 100 lbs. min / Fill: 100 lbs. min (ASTM D1683)
Crocking Resistance:	Dry: Class 5 / Wet: Class 5 (AATCC 8)
Colorfastness to Light:	Class 5 / 100 Hours (AATCC 16.3)

ACT® Registered Certification Marks

**Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance.*

Note: Dye lots may vary slightly.

Flammability Specifications

CAL TB 117-2013 - Pass | UFAC Class 1 | NFPA 260 Class 1 | ASTM E84*

*Tested as Almost with sheeting backing by adhered method.

Cleaning & Care

W/S/B, Wipe with a mild soap and water solution using a soft clean cloth or sponge. Avoid cleaners containing abrasives. Rinse with clean water, dry with a soft cloth or towel.

Bleach Cleanable: 1:10 household bleach to water solution. Thoroughly rinse all solution residue with clean water and air dry.

Sustainability

Prop 65 Compliant
No FR Additives – AB2998 Compliant
No Antimicrobial / Antibacterial Additives
PFAS Free
Heavy Metal Free
BPA Free / Tris Free / Formaldehyde Free
REACH Compliant
HHI Compliant

View additional colorways and the complete collection at braytontextiles.com

BRAYTON | TEXTILES

ACL320 Saddle

ACL321 Coffee

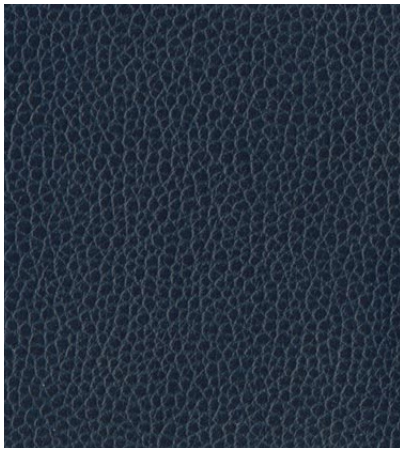

ACL323 Sapphire

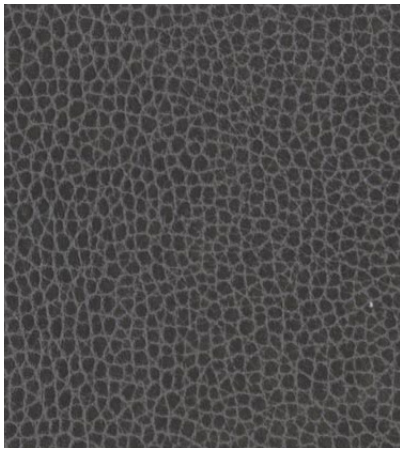

ACL325 Slate

ACL326 Black Granite

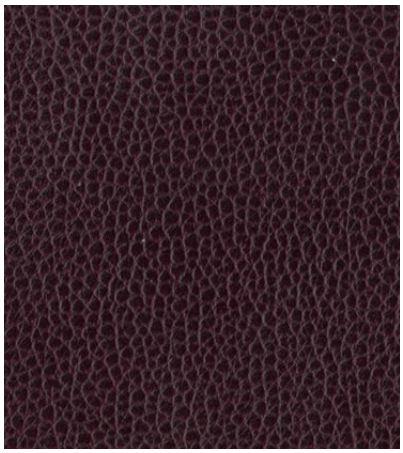

ACL327 Black Cherry

ACL328 Caramel

ALMOST® Classic

ALMOST®
DESIGN FOR LIVING

General Specifications

Composition:	100% Nylon Fiber Matrix
Application:	Heavy Duty Upholstery
Width:	54"
Weight:	13.2 ounces/linear yard
Repeat:	None
Pattern Direction:	Non-Directional
Country of Origin:	USA

Performance Characteristics

Abrasion Resistance:	250,000+ Double Rubs (Wyzenbeek)* (ASTM D4157)
Hydrolysis:	10 Weeks (ISO 1419:1995)
Tear Strength:	Warp: 30 lbs. min. / Fill: 30 lbs. min. (ASTM D6077-16)
Breaking Strength:	Warp: 100 lbs. min. / Fill: 100 lbs. min. (ASTM D5034)
Seam Strength:	Warp: 100 lbs. min / Fill: 100 lbs. min (ASTM D1683)
Crocking Resistance:	Dry: Class 5 / Wet: Class 5 (AATCC 8)
Colorfastness to Light:	Class 5 / 100 Hours (AATCC 16.3)

ACT® Registered Certification Marks

**Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance.*

Note: Dye lots may vary slightly.

Flammability Specifications

CAL TB 117-2013 - Pass | UFAC Class 1 | NFPA 260 Class 1 | ASTM E84*

*Tested as Almost with sheeting backing by adhered method.

Cleaning & Care

W/S/B, Wipe with a mild soap and water solution using a soft clean cloth or sponge. Avoid cleaners containing abrasives. Rinse with clean water, dry with a soft cloth or towel.

Bleach Cleanable: 1:10 household bleach to water solution. Thoroughly rinse all solution residue with clean water and air dry.

Sustainability

Prop 65 Compliant
No FR Additives – AB2998 Compliant
No Antimicrobial / Antibacterial Additives
PFAS Free
Heavy Metal Free
BPA Free / Tris Free / Formaldehyde Free
REACH Compliant
HHI Compliant

View additional colorways and the complete collection at braytontextiles.com

BRAYTON | TEXTILES

ALMOST® Glove

ALMOST®
DESIGN FOR LIVING

AGV400 Lemon

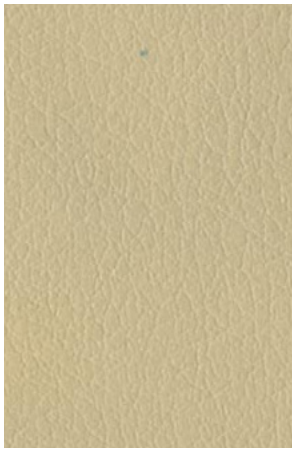

AGV402 Oatmeal

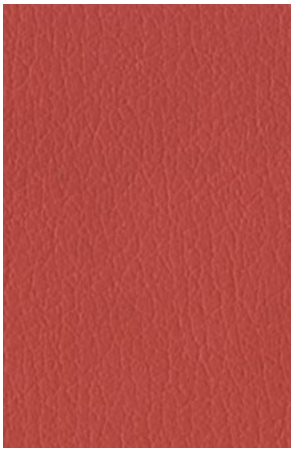

AGV405 Coral

AGV409 Magenta

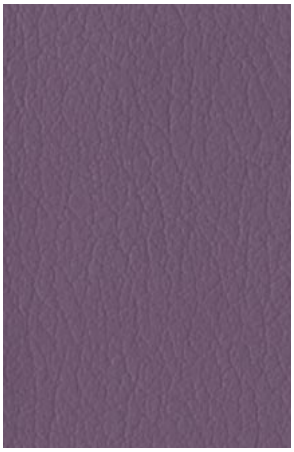

AGV411 Lavender

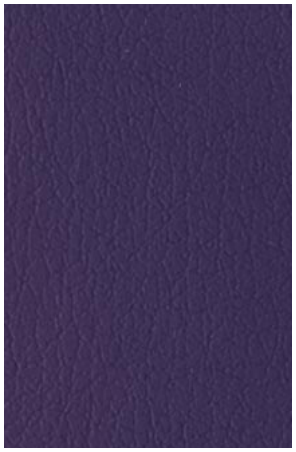

AGV412 Orchid

AGV413 Cornflower

AGV415 Lupine

AGV416 Turquoise

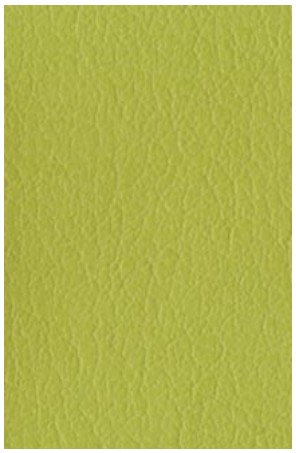

AGV420 Kiwi

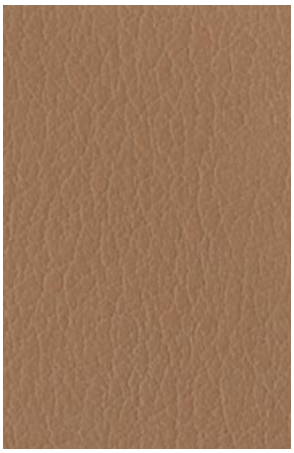

AGV424 Pretzel

BRAYTON | TEXTILES

ALMOST® Glove

ALMOST®
DESIGN FOR LIVING

General Specifications

Composition:	100% Nylon Fiber Matrix
Application:	Heavy Duty Upholstery
Width:	54"
Weight:	13.2 ounces/linear yard
Repeat:	None
Pattern Direction:	Non-Directional

Performance Characteristics

Abrasion Resistance:	250,000+ Double Rubs (Wyzenbeek)* (ASTM D4157)
Hydrolysis:	10 Weeks (ISO 1419:1995)
Tear Strength:	Warp: 30 lbs. min. / Fill: 30 lbs. min. (ASTM D6077-16)
Breaking Strength:	Warp: 100 lbs. min. / Fill: 100 lbs. min. (ASTM D5034)
Seam Strength:	Warp: 100 lbs. min / Fill: 100 lbs. min (ASTM D1683)
Crocking Resistance:	Dry: Class 5 / Wet: Class 5 (AATCC 8)
Colorfastness to Light:	Class 5 / 100 Hours (AATCC 16.3)

ACT® Registered Certification Marks

**Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance.*

Note: Dye lots may vary slightly.

Flammability Specifications

CAL TB 117-2013 - Pass | UFAC Class 1 | NFPA 260 Class 1 | ASTM E84*

*Tested as Almost with sheeting backing by adhered method.

Cleaning & Care

W/S/B, Wipe with a mild soap and water solution using a soft clean cloth or sponge. Avoid cleaners containing abrasives. Rinse with clean water, dry with a soft cloth or towel.

Bleach Cleanable: 1:10 household bleach to water solution. Thoroughly rinse all solution residue with clean water and air dry.

Sustainability

Prop 65 Compliant
No FR Additives – AB2998 Compliant
No Antimicrobial / Antibacterial Additives
PFAS Free
Heavy Metal Free
BPA Free / Tris Free / Formaldehyde Free
REACH Compliant
HHI Compliant

View additional colorways and the complete collection at braytontextiles.com

BRAYTON | TEXTILES

ALMOST® Icon

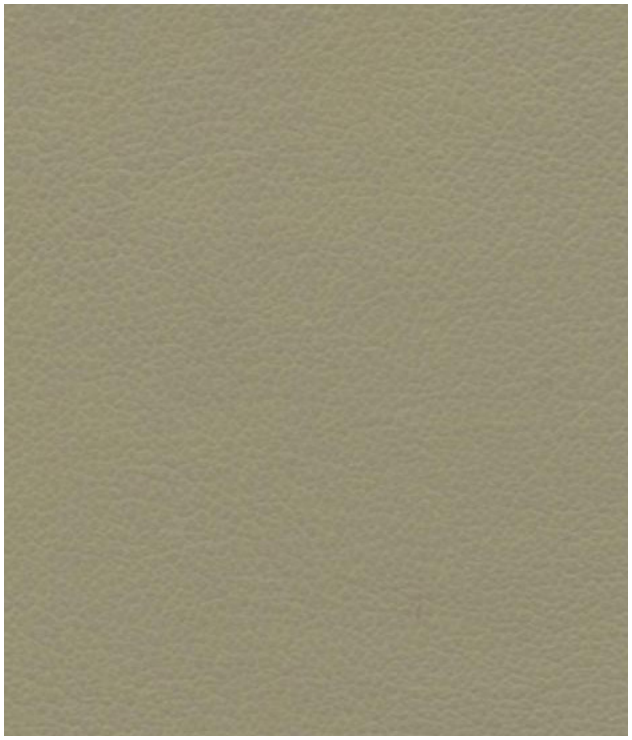

AICN215 Safari

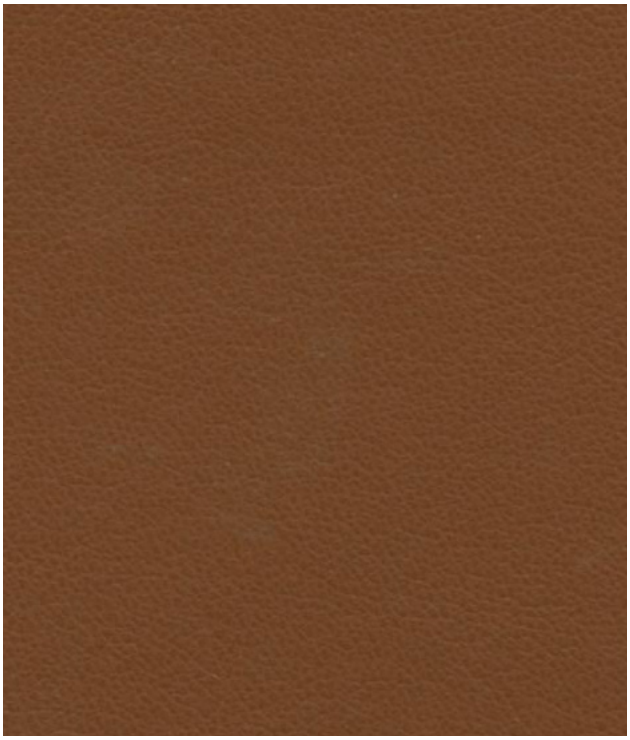

AICN216 Saddle

AICN217 Sapphire

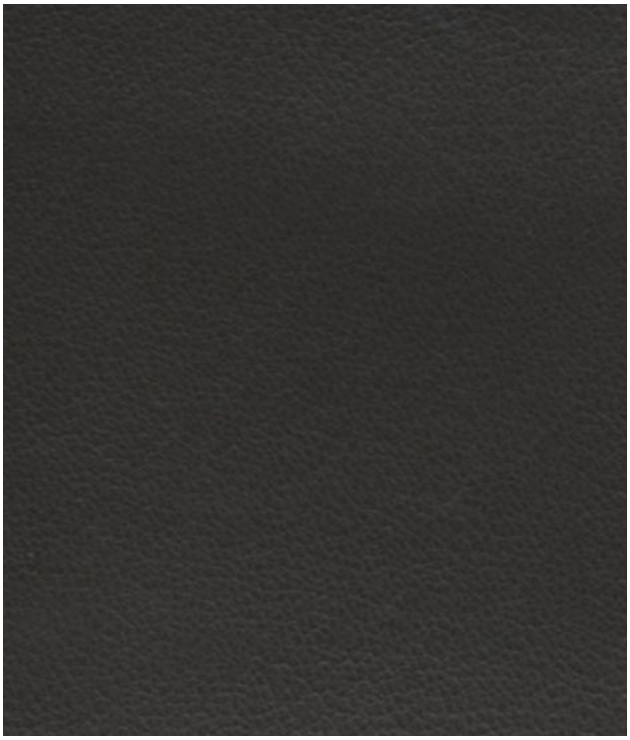

AICN219 Grey

ALMOST® Icon

ALMOST®
DESIGN FOR LIVING

General Specifications

Composition:	100% Nylon Fiber Matrix
Application:	Heavy Duty Upholstery
Width:	54"
Weight:	16.5 ounces/linear yard
Repeat:	None
Pattern Direction:	Non-Directional

Performance Characteristics

Abrasion Resistance:	250,000+ Double Rubs (Wyzenbeek)* (ASTM D4157)
Hydrolysis:	10 Weeks (ISO 1419:1995)
Tear Strength:	Warp: 30 lbs. min. / Fill: 30 lbs. min. (ASTM D6077-16)
Breaking Strength:	Warp: 100 lbs. min. / Fill: 100 lbs. min. (ASTM D5034)
Seam Strength:	Warp: 100 lbs. min / Fill: 100 lbs. min (ASTM D1683)
Crocking Resistance:	Dry: Class 5 / Wet: Class 5 (AATCC 8)
Colorfastness to Light:	Class 5 / 100 Hours (AATCC 16.3)

ACT® Registered Certification Marks

**Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance.*

Note: Dye lots may vary slightly.

Flammability Specifications

CAL TB 117-2013 - Pass | UFAC Class 1 | NFPA 260 Class 1 | ASTM E84*

*Tested as Almost with sheeting backing by adhered method.

Cleaning & Care

W/S/B, Wipe with a mild soap and water solution using a soft clean cloth or sponge. Avoid cleaners containing abrasives. Rinse with clean water, dry with a soft cloth or towel.

Bleach Cleanable: 1:10 household bleach to water solution. Thoroughly rinse all solution residue with clean water and air dry.

Sustainability

Prop 65 Compliant
No FR Additives – AB2998 Compliant
No Antimicrobial / Antibacterial Additives
PFAS Free
Heavy Metal Free
BPA Free / Tris Free / Formaldehyde Free
REACH Compliant
HHI Compliant

View additional colorways and the complete collection at braytontextiles.com

BRAYTON | TEXTILES

AMT767 Statue

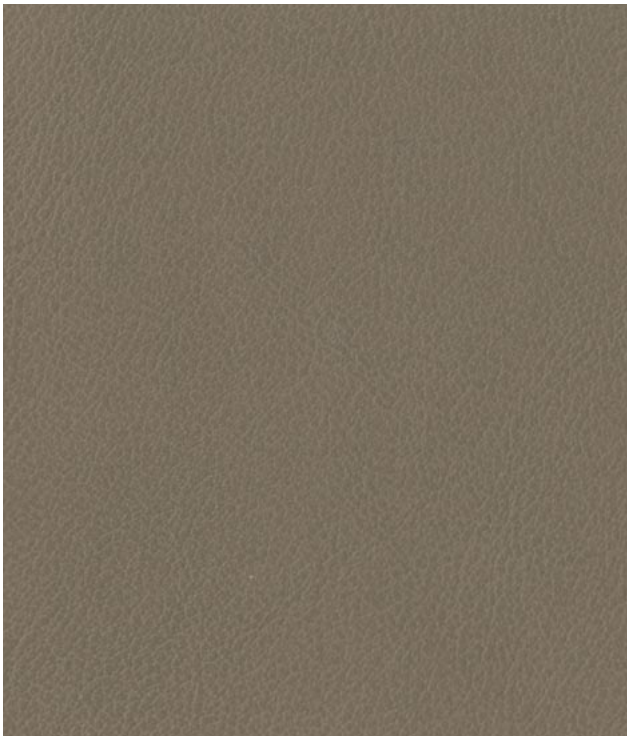

AMT769 Warm Taupe

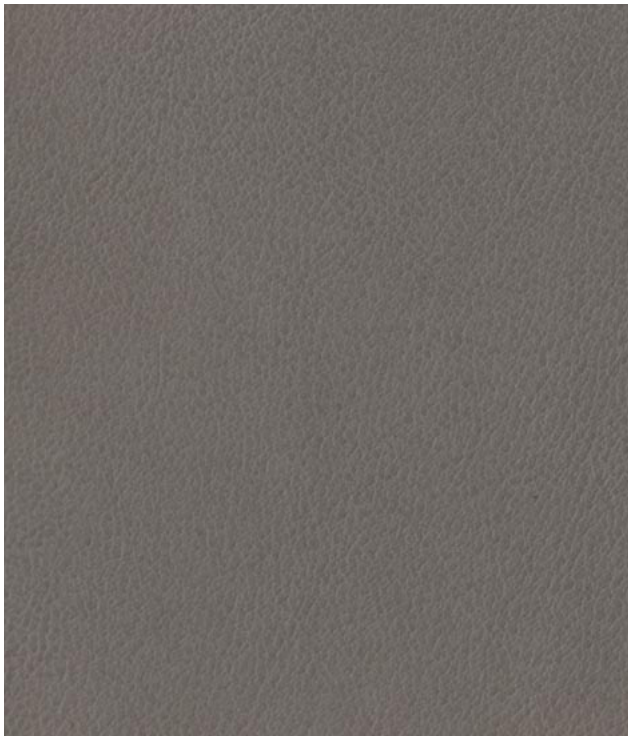

AMT770 Dove

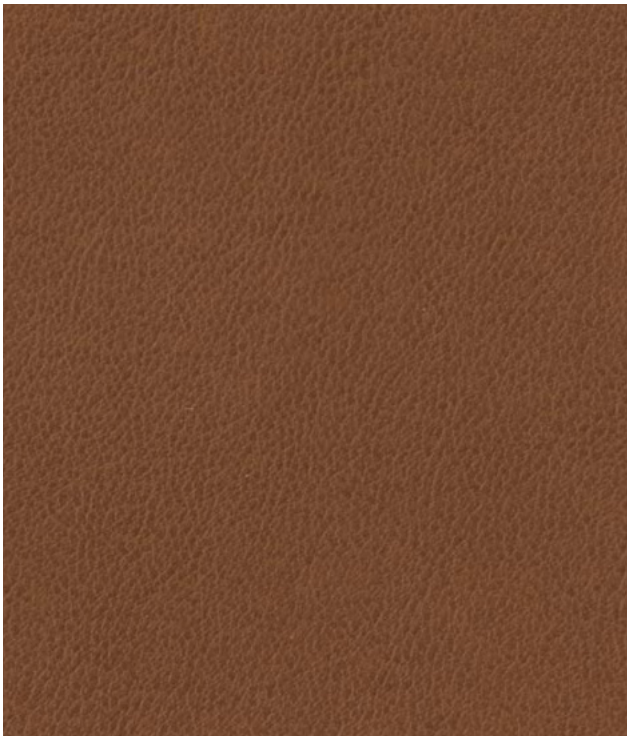

AMT771 Toasted

ALMOST® Matte

ALMOST®
DESIGN FOR LIVING

General Specifications

Composition:	100% Nylon Fiber Matrix
Application:	Heavy Duty Upholstery
Width:	54"
Weight:	13.2 ounces/linear yard
Repeat:	None
Pattern Direction:	Non-Directional
Country of Origin:	USA

Performance Characteristics

Abrasion Resistance:	250,000+ Double Rubs (Wyzenbeek)* (ASTM D4157)
Hydrolysis:	10 Weeks (ISO 1419:1995)
Tear Strength:	Warp: 30 lbs. min. / Fill: 30 lbs. min. (ASTM D6077-16)
Breaking Strength:	Warp: 100 lbs. min. / Fill: 100 lbs. min. (ASTM D5034)
Seam Strength:	Warp: 100 lbs. min / Fill: 100 lbs. min (ASTM D1683)
Crocking Resistance:	Dry: Class 5 / Wet: Class 5 (AATCC 8)
Colorfastness to Light:	Class 5 / 100 Hours (AATCC 16.3)

ACT® Registered Certification Marks

**Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance.*

Note: Dye lots may vary slightly.

Flammability Specifications

CAL TB 117-2013 - Pass | UFAC Class 1 | NFPA 260 Class 1 | ASTM E84*

*Tested as Almost with sheeting backing by adhered method.

Cleaning & Care

W/S/B, Wipe with a mild soap and water solution using a soft clean cloth or sponge. Avoid cleaners containing abrasives. Rinse with clean water, dry with a soft cloth or towel.

Bleach Cleanable: 1:10 household bleach to water solution. Thoroughly rinse all solution residue with clean water and air dry.

Sustainability

Prop 65 Compliant
No FR Additives – AB2998 Compliant
No Antimicrobial / Antibacterial Additives
PFAS Free
Heavy Metal Free
BPA Free / Tris Free / Formaldehyde Free
REACH Compliant
HHI Compliant

View additional colorways and the complete collection at braytontextiles.com

BRAYTON | TEXTILES

ALMOST® Nappa

ALMOST®
DESIGN FOR LIVING

ANA500 Sunflower

ANA501 Cappuccino

ANA502 Fawn

ANA504 Tangerine

ANA505 Cardinal

ANA509 Concord

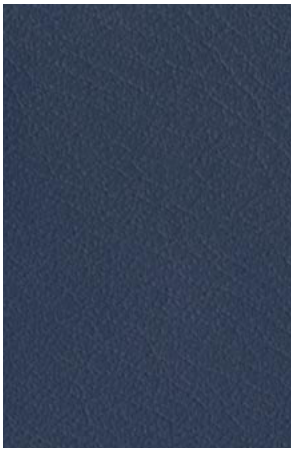

ANA511 Bluebell

ANA512 French Blue

ANA514 Lagoon

ANA517 Sage

ANA520 Black Ink

BRAYTON | TEXTILES

ALMOST® Nappa

ALMOST®
DESIGN FOR LIVING

General Specifications

Composition:	100% Nylon Fiber Matrix
Application:	Heavy Duty Upholstery
Width:	54"
Weight:	13.2 ounces/linear yard
Repeat:	None
Pattern Direction:	Non-Directional

Performance Characteristics

Abrasion Resistance:	250,000+ Double Rubs (Wyzenbeek)* (ASTM D4157)
Hydrolysis:	10 Weeks (ISO 1419:1995)
Tear Strength:	Warp: 30 lbs. min. / Fill: 30 lbs. min. (ASTM D6077-16)
Breaking Strength:	Warp: 100 lbs. min. / Fill: 100 lbs. min. (ASTM D5034)
Seam Strength:	Warp: 100 lbs. min / Fill: 100 lbs. min (ASTM D1683)
Crocking Resistance:	Dry: Class 5 / Wet: Class 5 (AATCC 8)
Colorfastness to Light:	Class 5 / 100 Hours (AATCC 16.3)

ACT® Registered Certification Marks

**Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance.*

Note: Dye lots may vary slightly.

Flammability Specifications

CAL TB 117-2013 - Pass | UFAC Class 1 | NFPA 260 Class 1 | ASTM E84*

*Tested as Almost with sheeting backing by adhered method.

Cleaning & Care

W/S/B, Wipe with a mild soap and water solution using a soft clean cloth or sponge. Avoid cleaners containing abrasives. Rinse with clean water, dry with a soft cloth or towel.

Bleach Cleanable: 1:10 household bleach to water solution. Thoroughly rinse all solution residue with clean water and air dry.

Sustainability

Prop 65 Compliant
No FR Additives – AB2998 Compliant
No Antimicrobial / Antibacterial Additives
PFAS Free
Heavy Metal Free
BPA Free / Tris Free / Formaldehyde Free
REACH Compliant
HHI Compliant

View additional colorways and the complete collection at braytontextiles.com

BRAYTON | TEXTILES

ALMOST® Ostrich

ALMOST®
DESIGN FOR LIVING

AOS823 Baltic

AOS824 Aubergine

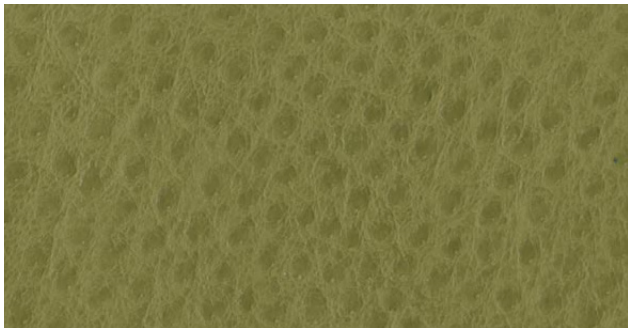

AOS826 Alfalfa

AOS830 Winter

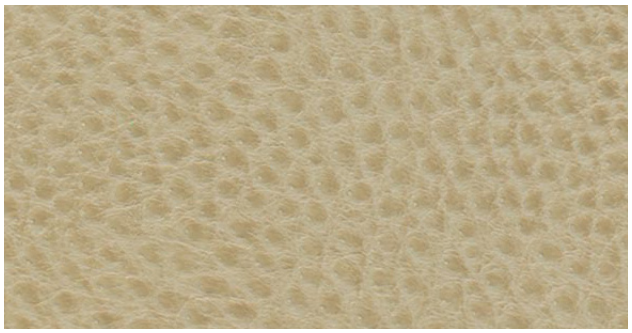

AOS833 Sand Dune

AOS854 Green Garden

AOS856 Grape

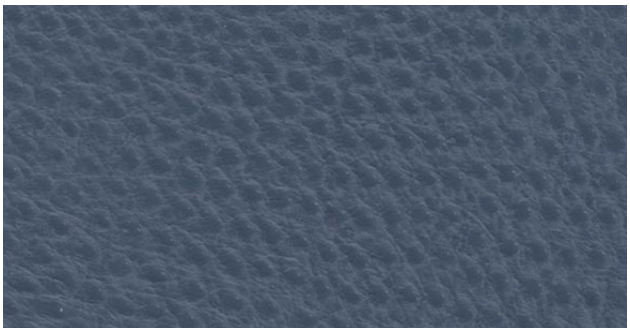

AOS857 Blue Bird

BRAYTON | TEXTILES

ALMOST® Ostrich

ALMOST®
DESIGN FOR LIVING

General Specifications

Composition:	100% Nylon Fiber Matrix
Application:	Heavy Duty Upholstery
Width:	54"
Weight:	13.2 ounces/linear yard
Repeat:	None
Pattern Direction:	Non-Directional

Performance Characteristics

Abrasion Resistance:	250,000+ Double Rubs (Wyzenbeek)* (ASTM D4157)
Hydrolysis:	10 Weeks (ISO 1419:1995)
Tear Strength:	Warp: 30 lbs. min. / Fill: 30 lbs. min. (ASTM D6077-16)
Breaking Strength:	Warp: 100 lbs. min. / Fill: 100 lbs. min. (ASTM D5034)
Seam Strength:	Warp: 100 lbs. min / Fill: 100 lbs. min (ASTM D1683)
Crocking Resistance:	Dry: Class 5 / Wet: Class 5 (AATCC 8)
Colorfastness to Light:	Class 5 / 100 Hours (AATCC 16.3)

ACT® Registered Certification Marks

**Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance.*

Note: Dye lots may vary slightly.

Flammability Specifications

CAL TB 117-2013 - Pass | UFAC Class 1 | NFPA 260 Class 1 | ASTM E84*

*Tested as Almost with sheeting backing by adhered method.

Cleaning & Care

W/S/B, Wipe with a mild soap and water solution using a soft clean cloth or sponge. Avoid cleaners containing abrasives. Rinse with clean water, dry with a soft cloth or towel.

Bleach Cleanable: 1:10 household bleach to water solution. Thoroughly rinse all solution residue with clean water and air dry.

Sustainability

Prop 65 Compliant
No FR Additives – AB2998 Compliant
No Antimicrobial / Antibacterial Additives
PFAS Free
Heavy Metal Free
BPA Free / Tris Free / Formaldehyde Free
REACH Compliant
HHI Compliant

View additional colorways and the complete collection at braytontextiles.com

BRAYTON | TEXTILES

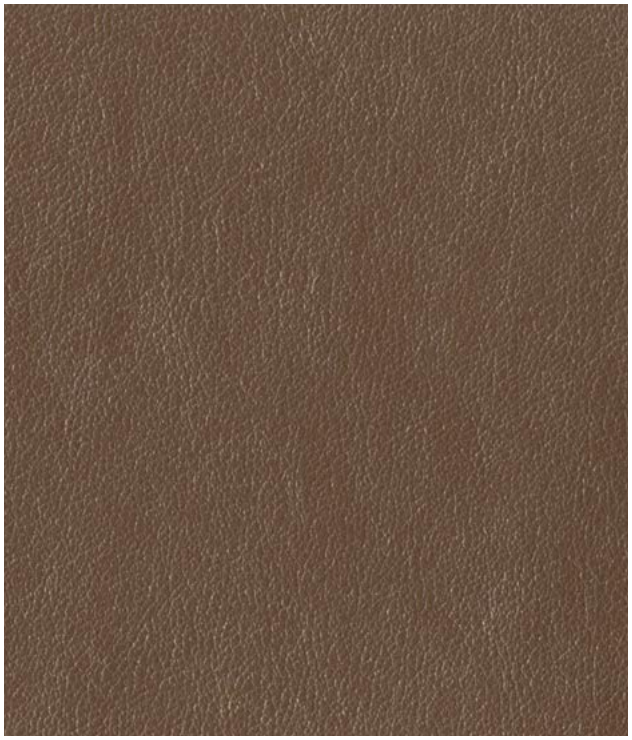

APL704 Fire

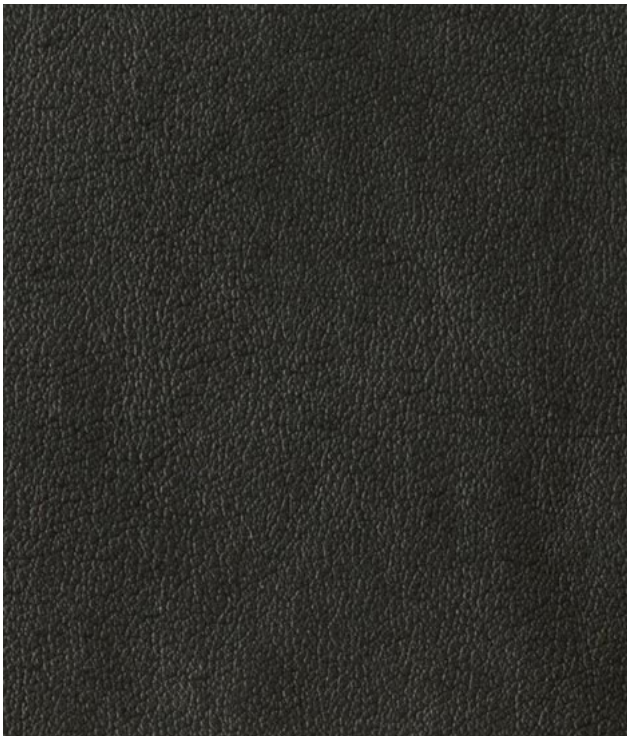

APL720 Black Pearl

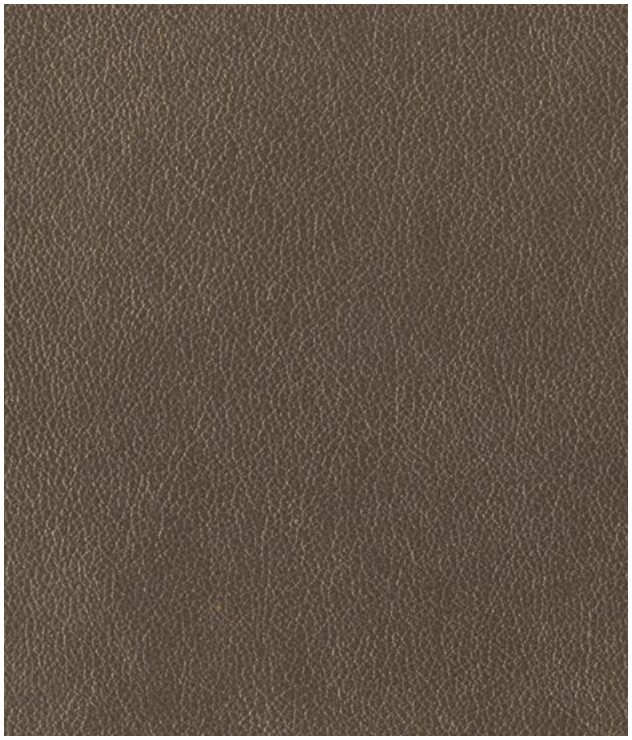

APL722 Pewter

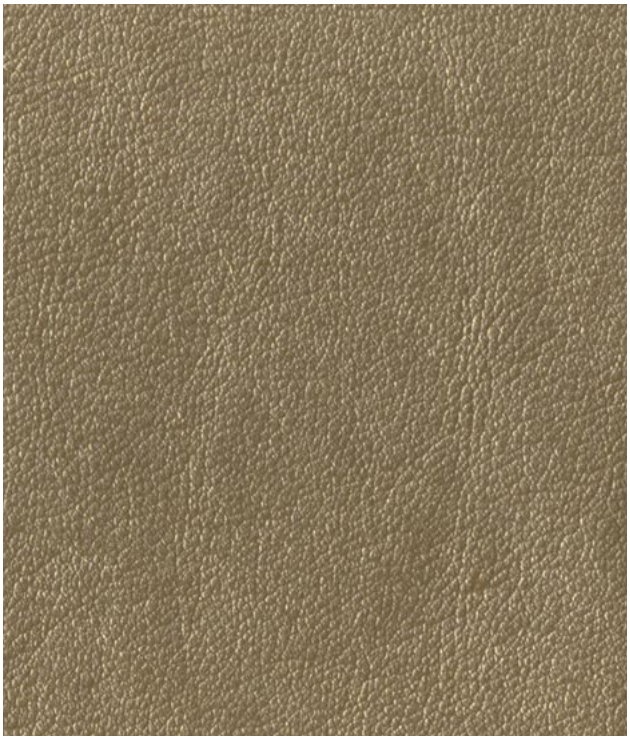

APL723 Alloy

ALMOST® Pearl

ALMOST®
DESIGN FOR LIVING

General Specifications

Composition:	100% Nylon Fiber Matrix
Application:	Heavy Duty Upholstery
Width:	54"
Weight:	13.2 ounces/linear yard
Repeat:	None
Pattern Direction:	Non-Directional
Country of Origin:	USA

Performance Characteristics

Abrasion Resistance:	250,000+ Double Rubs (Wyzenbeek)* (ASTM D4157)
Hydrolysis:	10 Weeks (ISO 1419:1995)
Tear Strength:	Warp: 30 lbs. min. / Fill: 30 lbs. min. (ASTM D6077-16)
Breaking Strength:	Warp: 100 lbs. min. / Fill: 100 lbs. min. (ASTM D5034)
Seam Strength:	Warp: 100 lbs. min / Fill: 100 lbs. min (ASTM D1683)
Crocking Resistance:	Dry: Class 5 / Wet: Class 5 (AATCC 8)
Colorfastness to Light:	Class 5 / 100 Hours (AATCC 16.3)

ACT® Registered Certification Marks

**Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance.*

Note: Dye lots may vary slightly.

Flammability Specifications

CAL TB 117-2013 - Pass | UFAC Class 1 | NFPA 260 Class 1 | ASTM E84*

*Tested as Almost with sheeting backing by adhered method.

Cleaning & Care

W/S/B, Wipe with a mild soap and water solution using a soft clean cloth or sponge. Avoid cleaners containing abrasives. Rinse with clean water, dry with a soft cloth or towel.

Bleach Cleanable: 1:10 household bleach to water solution. Thoroughly rinse all solution residue with clean water and air dry.

Sustainability

Prop 65 Compliant
No FR Additives – AB2998 Compliant
No Antimicrobial / Antibacterial Additives
PFAS Free
Heavy Metal Free
BPA Free / Tris Free / Formaldehyde Free
REACH Compliant
HHI Compliant

View additional colorways and the complete collection at braytontextiles.com

BRAYTON | TEXTILES

ALMOST® **Suede**

AMS1003 Latte

AMS1004 Foggy Bay

AMS1026 Doe



AMS1033 Seal

AMS1036 Grey Whale

AMS1072 Raisin

AMS1080 Battleship Grey

AMS1105 Blonde

AMS1009 Mink

BRAYTON
PAUL BRAYTON DESIGNS

ALMOST® **Suede**

CONTENT:	100% Nylon
WIDTH:	54"
APPLICATION:	Heavy Duty Upholstery
DURABILITY:	250,000+ Double Rubs - Wyzenbeek
FLAMMABILITY CLASS:	1. California Tech. Bulletin 117 Sec. E Class 1 2. UFAC Class 1 3. NFPA-260 Class 1
CLEANING CODE:	W / S (We recommend using EPA registered disinfectants as opposed to homemade dilutions whenever possible. Bleach and Water solutions must be diluted 1/10 making sure to rinse after 10 minutes.)

ALMOST® Textura

ALMOST®
DESIGN FOR LIVING

ATX600 Antique White

ATX602 Parchment

ATX603 Sandstone

ATX604 Driftwood

ATX605 Dune



ATX606 Jute

ATX607 Buttercreme

ATX608 Pecan

ATX609 Russet

ATX610 Havana



ATX613 Laurel



ATX614 Boxwood

ATX617 Wild Plum

ATX621 Marine

ATX622 Cape Blue



ATX623 Saxe Blue



ATX626 Onyx

ATX627 Smoke Stone

ATX629 Artichoke

ATX630 Paprika



ATX631 Hazel

ATX634 Steel

BRAYTON | TEXTILES

ALMOST® Textura

ALMOST®
DESIGN FOR LIVING

General Specifications

Composition:	100% Nylon Fiber Matrix
Application:	Heavy Duty Upholstery
Width:	54"
Weight:	14.25 ounces/linear yard
Repeat:	None
Pattern Direction:	Non-Directional

Performance Characteristics

Abrasion Resistance:	250,000+ Double Rubs (Wyzenbeek)* (ASTM D4157)
Hydrolysis:	10 Weeks (ISO 1419:1995)
Tear Strength:	Warp: 30 lbs. min. / Fill: 30 lbs. min. (ASTM D6077-16)
Breaking Strength:	Warp: 100 lbs. min. / Fill: 100 lbs. min. (ASTM D5034)
Seam Strength:	Warp: 100 lbs. min / Fill: 100 lbs. min (ASTM D1683)
Crocking Resistance:	Dry: Class 5 / Wet: Class 5 (AATCC 8)
Colorfastness to Light:	Class 5 / 100 Hours (AATCC 16.3)

ACT® Registered Certification Marks

**Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance.*

Note: Dye lots may vary slightly.

Flammability Specifications

CAL TB 117-2013 - Pass | UFAC Class 1 | NFPA 260 Class 1 | ASTM E84*

*Tested as Almost with sheeting backing by adhered method.

Cleaning & Care

W/S/B, Wipe with a mild soap and water solution using a soft clean cloth or sponge. Avoid cleaners containing abrasives. Rinse with clean water, dry with a soft cloth or towel.

Bleach Cleanable: 1:10 household bleach to water solution. Thoroughly rinse all solution residue with clean water and air dry.

Sustainability

Prop 65 Compliant
No FR Additives – AB2998 Compliant
No Antimicrobial / Antibacterial Additives
PFAS Free
Heavy Metal Free
BPA Free / Tris Free / Formaldehyde Free
REACH Compliant
HHI Compliant

View additional colorways and the complete collection at braytontextiles.com

BRAYTON | TEXTILES

AGGV301 Pearl Gelato

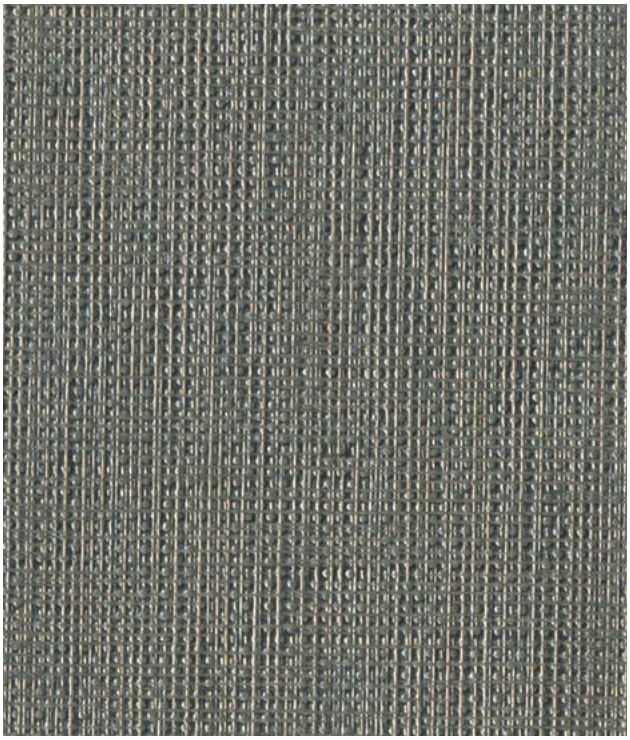

AGGV302 Mercury

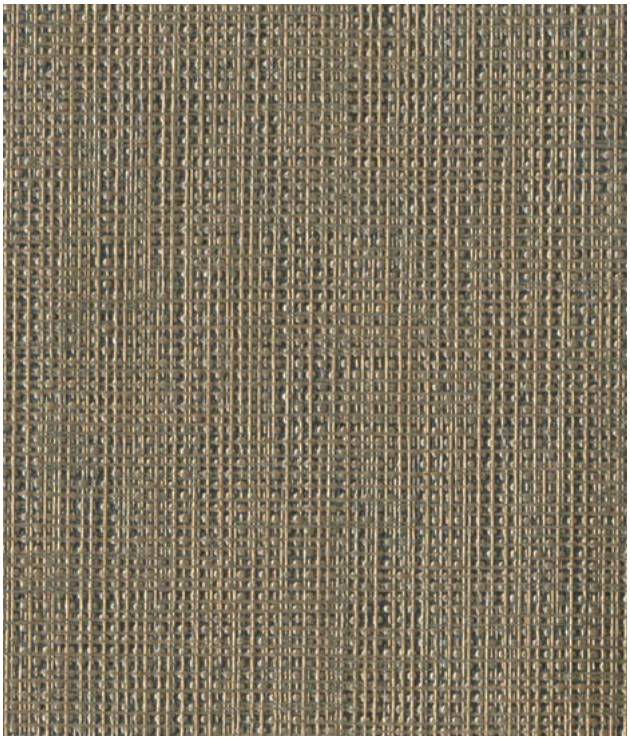

AGGV306 Tan

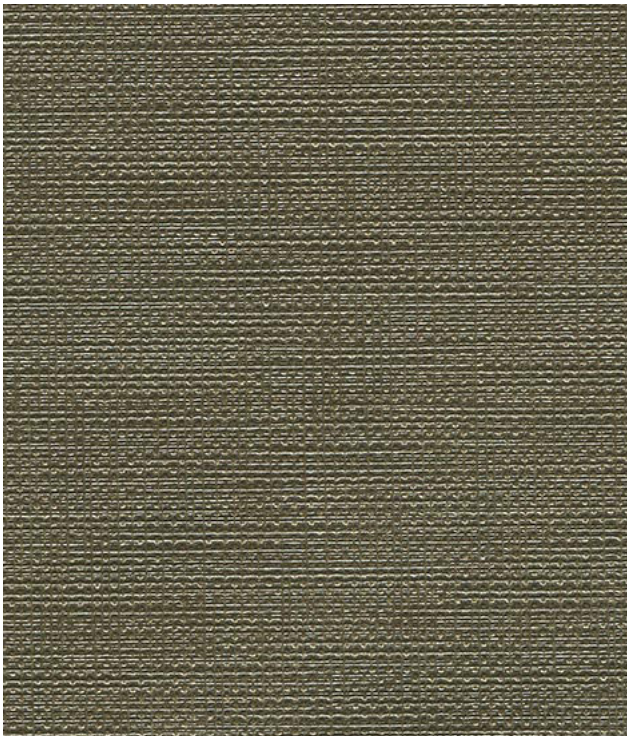

AGGV310 Quarry

ALMOST® Vogue

ALMOST®
DESIGN FOR LIVING

General Specifications

Composition:	100% Nylon Fiber Matrix
Application:	Heavy Duty Upholstery
Width:	54"
Weight:	13.2 ounces/linear yard
Repeat:	None
Pattern Direction:	Non-Directional

Performance Characteristics

Abrasion Resistance:	250,000+ Double Rubs (Wyzenbeek)* (ASTM D4157)
Hydrolysis:	10 Weeks (ISO 1419:1995)
Tear Strength:	Warp: 30 lbs. min. / Fill: 30 lbs. min. (ASTM D6077-16)
Breaking Strength:	Warp: 100 lbs. min. / Fill: 100 lbs. min. (ASTM D5034)
Seam Strength:	Warp: 100 lbs. min / Fill: 100 lbs. min (ASTM D1683)
Crocking Resistance:	Dry: Class 5 / Wet: Class 5 (AATCC 8)
Colorfastness to Light:	Class 5 / 100 Hours (AATCC 16.3)

ACT® Registered Certification Marks

**Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance.*

Note: Dye lots may vary slightly.

Flammability Specifications

CAL TB 117-2013 - Pass | UFAC Class 1 | NFPA 260 Class 1 | ASTM E84*

*Tested as Almost with sheeting backing by adhered method.

Cleaning & Care

W/S/B, Wipe with a mild soap and water solution using a soft clean cloth or sponge. Avoid cleaners containing abrasives. Rinse with clean water, dry with a soft cloth or towel.

Bleach Cleanable: 1:10 household bleach to water solution. Thoroughly rinse all solution residue with clean water and air dry.

Sustainability

Prop 65 Compliant
No FR Additives – AB2998 Compliant
No Antimicrobial / Antibacterial Additives
PFAS Free
Heavy Metal Free
BPA Free / Tris Free / Formaldehyde Free
REACH Compliant
HHI Compliant

View additional colorways and the complete collection at braytontextiles.com

BRAYTON | TEXTILES

Bayside

BS01 Ranch

BS02 Trail

BS03 Canyon



BS04 Desert Park

BS05 Carmel

BS06 Cliff



BS07 Del Mar

BS08 Naval

BS09 Agave



BS10 Sea Cave



BS11 Torrey Pine

BS12 Vista

BS13 Silver Strand



BS14 Blackbird

BS15 Camino

BS16 Catalina

BS17 Coronado



BS18 Cedar Creek

BRAYTON | TEXTILES

Bayside

General Specifications

Composition:	Polycarbonate Blended Surface
Backing:	65% Polyester, 35% Cotton
Width:	54"
Weight:	18.79 ounces/linear yard
Repeat:	None
Pattern Direction:	Non-Directional
Country of Origin:	Mexico

Performance Characteristics

Abrasion Resistance:	200,000 Double Rubs (Wyzenbeek)* ASTM D4157 | 150,000 Rubs (Martindale)*
Hydrolysis:	10 Weeks (ASTM D3690 Sect. 6.11)
Adhesion Coating:	Warp: 3 lbs. min. / Fill: 3 lbs. min. (ASTM D751)
Tear Strength:	Warp: 6 lbs. min. / Fill: 4 lbs. min. (ASTM D2261)
Breaking Strength:	Warp: 60 lbs. min. / Fill: 60 lbs. min. (ASTM D751)
Seam Slippage:	Warp: 89.8 lbs. / Fill: 72.4 lbs. (ASTM D751)
Crocking Resistance:	Dry: Class 4-5 / Wet: Class 4-5 (AATCC 8)
Colorfastness to Light:	Class 4 / 200 Hours (AATCC 16.3)

ACT® Registered Certification Marks

**Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance.*

Note: Dye lots may vary slightly.

Flammability Specifications

CAL TB 117-2013 - Pass, UFAC Class 1, NFPA 260 Class 1, FMVSS 302 - Pass, ASTM E84 (Adhered, Unadhered)

Cleaning & Care

W/S/B, Wipe up spills as soon as they occur. Clean with soap and water. For stubborn stains, wipe off with isopropyl alcohol.

Bleach Cleanable: 1:5 household bleach to water solution. Thoroughly rinse all solution residue with clean water and air dry.

Sustainability

Prop 65 Compliant

No FR Additives – AB2998 Compliant

PFAS Free

No PVC, plasticizers, or formaldehyde intentionally added

REACH Compliant

Does not contain any Red List chemicals

View additional colorways and the complete collection at braytontextiles.com

BRAYTON | TEXTILES

Boho

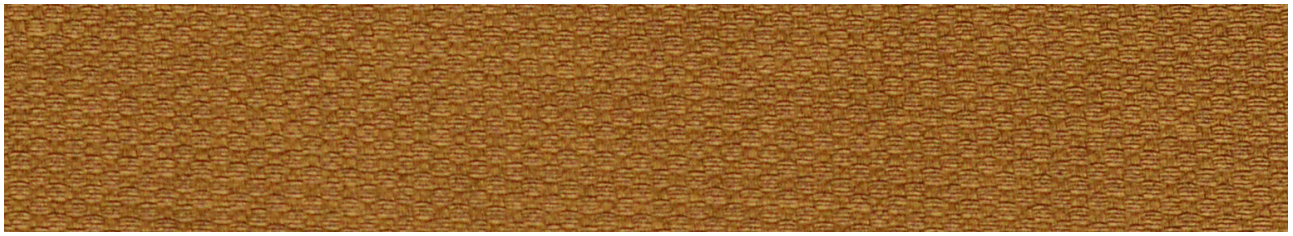

Boho001 Tawny

Boho002 Indigo Jeans

Boho004 Blue Note



Boho006 Night Owl



Boho007 Orange Soda

Boho008 Kale

Boho009 Roast Coffee

Boho012 Grass

Boho014 Cotton

Boho101 Licorice

Boho102 Monterey Grey

Boho103 Purple Haze

Boho104 Tree Hugger

Boho105 Marigold



Boho106 Sprout



Boho107 Poolside

Boho108 Raspberry Berét

BRAYTON | TEXTILES

Boho

General Specifications

Composition:	100% PVC (Phthalate Free)
Finish:	Resilience Stain Repellent (PFAS Free)
Backing:	100% Polyester
Width:	54"
Weight:	28.0 ounces/linear yard
Repeat:	None
Pattern Direction:	Non-Directional
Country of Origin:	Taiwan

Performance Characteristics

Abrasion Resistance:	250,000+ Double Rubs (Wyzenbeek)* ASTM (D4157)
Adhesion Coating:	Warp: 8.19 lbs. / Fill: 7.60 lbs. (ASTM D751-06)
Tear Strength:	Warp: 3.1 lbs. / Fill: 6.2 lbs. (ASTM D751-06)
Breaking Strength:	Warp: 97 lbs. / Fill: 60 lbs. (ASTM D751-06)
Seam Strength:	Warp: 42 lbs. / Fill: 30 lbs. (ASTM D751-06)
Crocking Resistance:	Dry: Class 5.0 / Wet: Class 5.0 (AATCC 8)
Colorfastness to Light:	Class 4.5 / 660 Hours (AATCC 16.3)

ACT® Registered Certification Marks

**Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance.*

Note: Dye lots may vary slightly.

Flammability Specifications

CAL TB 117-2013 - Pass, UFAC Class 1, NFPA 260 Class 1, FMVSS 302 - Pass

Cleaning & Care

W/S/B, Clean the soiled area with mild soap and water, then rinse with fresh water and wipe dry with a clean cloth.

Bleach Cleanable: 1:10 household bleach to water solution.

Sustainability

Prop 65 Compliant
No FR Additives – AB2998 Compliant
No Antimicrobial / Antibacterial Additives
PFAS Free
Heavy Metal Free
BPA Free / Tris Free / Formaldehyde Free
Does Not Contain Conflict Minerals
REACH Compliant
ROHS Compliant
HHI / Greenhealth Compliant

View additional colorways and the complete collection at braytontextiles.com

BRAYTON | TEXTILES

Ginseng

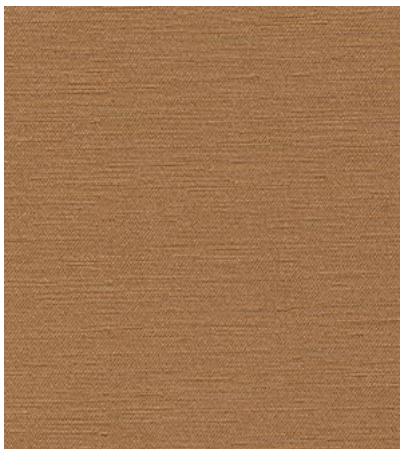

GN06 Gourd

GN08 Quartz

GN10 Sparrow

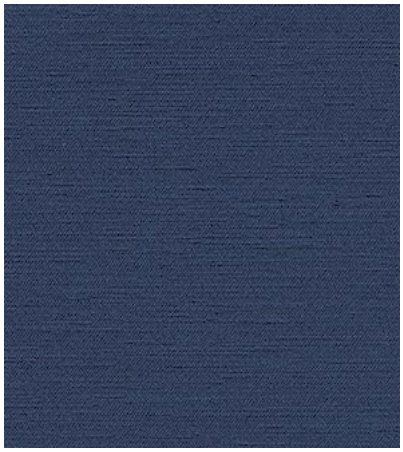

GN11 Ming

GN13 Rice

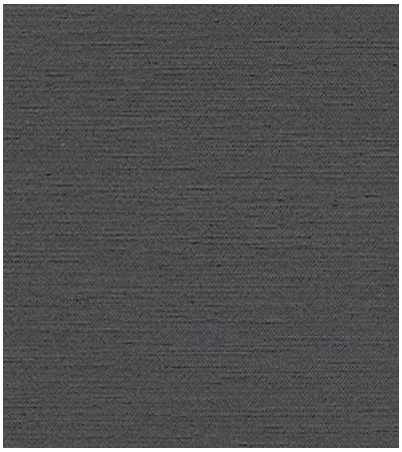

GN21 Dragon

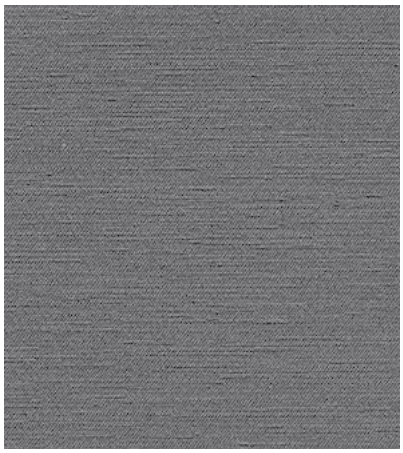

GN22 Cave

GN23 Pacific

GN24 Lark

BRAYTON | TEXTILES

Ginseng

General Specifications

Composition:	100% PVC (Phthalate Free)
Finish:	Resilience Stain Repellent (PFAS Free)
Backing:	100% Polyester
Width:	54"
Weight:	30.0 ounces/linear yard
Repeat:	None
Pattern Direction:	Up the Roll

Performance Characteristics

Abrasion Resistance:	250,000+ Double Rubs (Wyzenbeek)* (ASTM D4157)
Adhesion Coating::	Warp: 4.31 lbs. / Fill: 4.61 lbs. (ASTM D751-06)
Tear Strength:	Warp: 9.8 lbs. / Fill: 11.7 lbs. (ASTM D751-06)
Breaking Strength:	Warp: 121 lbs. / Fill: 125 lbs. (ASTM D751-06)
Seam Strength:	Warp: 44.8 lbs. / Fill: 53.7 lbs. (ASTM D751-06)
Crocking Resistance:	Dry: Class 5.0 / Wet: Class 5.0 (AATCC 8)
Colorfastness to Light:	Class 4.0 / 500 Hours (AATCC 16.3)

ACT® Registered Certification Marks

**Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance.*

Note: Dye lots may vary slightly.

Flammability Specifications

CAL TB 117-2013 - Pass | UFAC Class 1 | NFPA 260 Class 1 | FMVSS 302 - Pass

Cleaning & Care

W/S/B, Clean the soiled area with mild soap and water, then rinse with fresh water and wipe dry with a clean cloth.

Bleach Cleanable: 1:10 household bleach to water solution.

Sustainability

Prop 65 Compliant

No FR Additives – AB2998 Compliant

No Antimicrobial / Antibacterial Additives

PFAS Free

Heavy Metal Free

BPA Free / Tris Free / Formaldehyde Free

Does Not Contain Conflict Minerals

REACH Compliant

ROHS Compliant

HHI / Greenhealth Compliant

Harbor

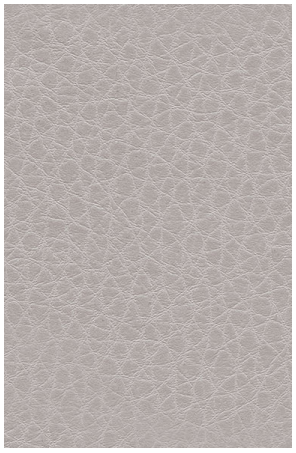

HB01 Snowball

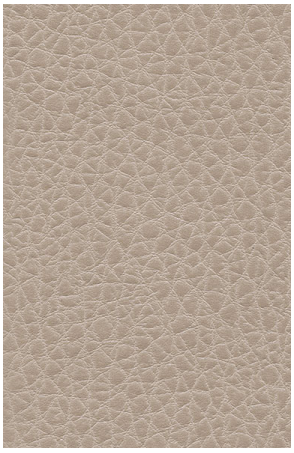

HB02 Creamy Grey

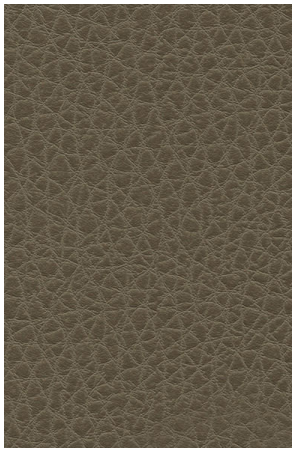

HB03 Cobblestone

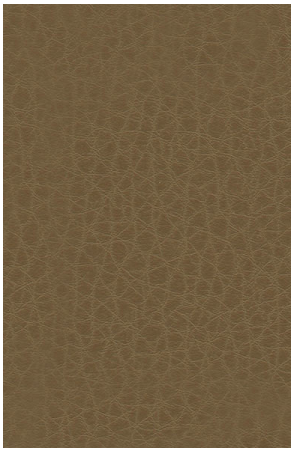

HB04 Beachwood

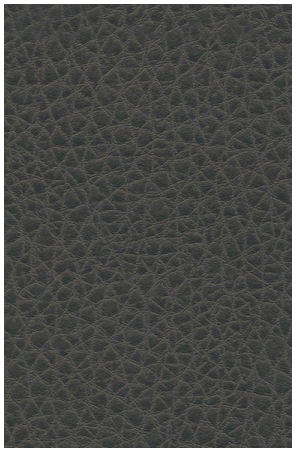

HB05 Charred

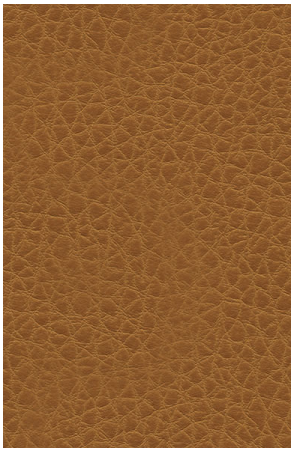

HB06 Almond Shell

HB07 Butter Rum

HB08 Apple Cider

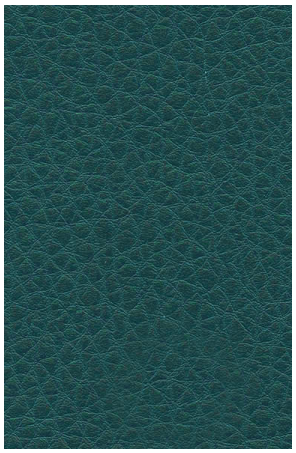

HB09 Blue Hill

HB10 Tea Leaf

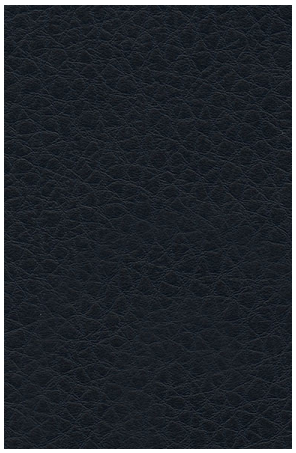

HB11 Bristol

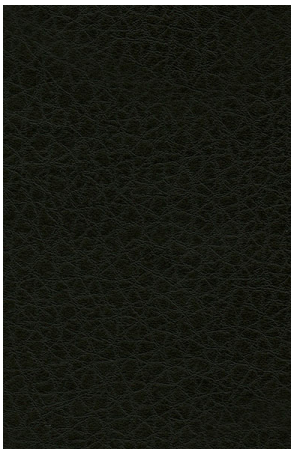

HB12 Whale Watch

BRAYTON | TEXTILES

Harbor

General Specifications

Composition:	Polycarbonate Blended Surface
Backing:	65% Polyester, 35% Cotton
Width:	54"
Weight:	18.79 ounces/linear yard
Repeat:	None
Pattern Direction:	Non-Directional
Country of Origin:	Mexico

Performance Characteristics

Abrasion Resistance:	200,000 Double Rubs (Wyzenbeek)* (ASTM D4157) | 150,000 Rubs (Martindale)*
Hydrolysis:	10 Weeks (ASTM D3690 Sect. 6.11)
Adhesion Coating:	Warp: 3 lbs. min. / Fill: 3 lbs. min. (ASTM D751)
Tear Strength:	Warp: 6 lbs. min. / Fill: 6 lbs. min. (ASTM D2261)
Breaking Strength:	Warp: 60 lbs. min. / Fill: 60 lbs. min. (ASTM D751)
Seam Slippage:	Warp: 89.8 lbs. / Fill: 72.4 lbs. (ASTM D751)
Crocking Resistance:	Dry: Class 4-5 / Wet: Class 4-5 (AATCC 8)
Colorfastness to Light:	Class 4 / 200 Hours (AATCC 16.3)

ACT® Registered Certification Marks

**Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance.*

Note: Dye lots may vary slightly.

Flammability Specifications

CAL TB 117-2013 - Pass | UFAC Class 1 | NFPA 260 Class 1 | FMVSS 302 - Pass | ASTM E84 (Adhered)

Cleaning & Care

W/S/B, Wipe up spills as soon as they occur. Clean with soap and water. For stubborn stains, wipe off with isopropyl alcohol.

Bleach Cleanable: 1:5 household bleach to water solution. Thoroughly rinse all solution residue with clean water and air dry.

Sustainability

Prop 65 Compliant

No FR Additives – AB2998 Compliant

PFAS Free

No PVC, plasticizers, or formaldehyde intentionally added

REACH Compliant

Does not contain any Red List chemicals

View additional colorways and the complete collection at braytontextiles.com

BRAYTON | TEXTILES

Harmony

Porcelain HA-01

Plaza HA-02

Calm Taupe HA-03

Deep Pool HA-09

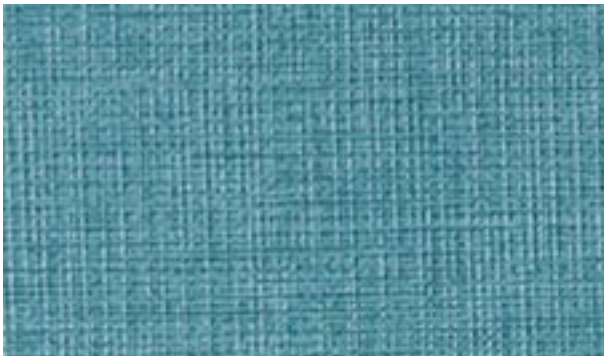

Sea Glass HA-10

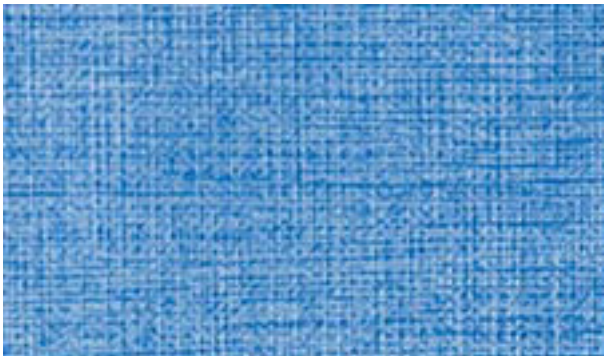

Brilliant Sky HA-12

Dark Navy HA-13

Harmony

CONTENT:	62% PU; 19% Rayon; 19% Polyester
SURFACE COMPOSITION:	100% Polycarbonate
BACKING COMPOSITION:	50% Rayon, 50% Polyester
FINISH:	Sta-Kleen®
WIDTH: 54"	**REPEAT:** N/A
PATTERN DIRECTION:	N/A
APPLICATION:	Heavy Duty Upholstery
HYDROLYSIS RESISTANCE:	15 Weeks
UV STABILITY:	Light Fastness 1000 Hours
CROCKING RESISTANCE:	Wet 5; Dry 5
BLUE DYE RESISTANCE:	Wet 4-5; Dry 4-5
DURABILITY:	500,000+ Double Rubs - Wyzenbeek
WEIGHT:	17.7 oz./yd +/-10%
FLAMMABILITY CLASS:	IMO A.652(16)8.2 / CA TB117-2013 / NFPA 260 U.F.A.C. Class 1 / FMVSS/CMVSS #302
CLEANING CODE:	W / S /BC 4:1 Water to Bleach Solution
ECO FEATURES:	1. No PVC, plasticizers, phthalates, stabilizers, heavy metals, or Bisphenol A 2. No chemical flame retardants 3. No persistent organic pollutants 4. RoHS, REACH and Prop65 compliant 5. No toxic by-products 6. No anti-microbial additives

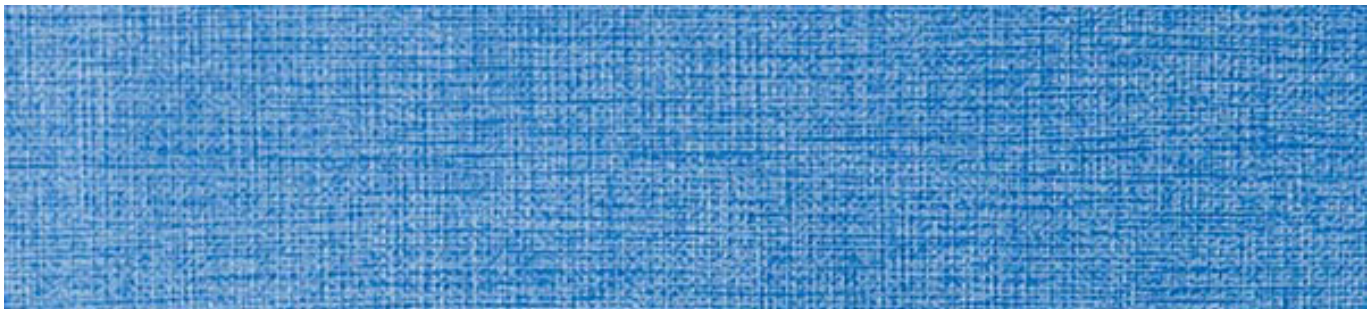

Healthier Hospitals
A PRACTICE GREENHEALTH PROGRAM

sta-kleen™
POLYCARBONATE

Writer's Block Tolstoy II

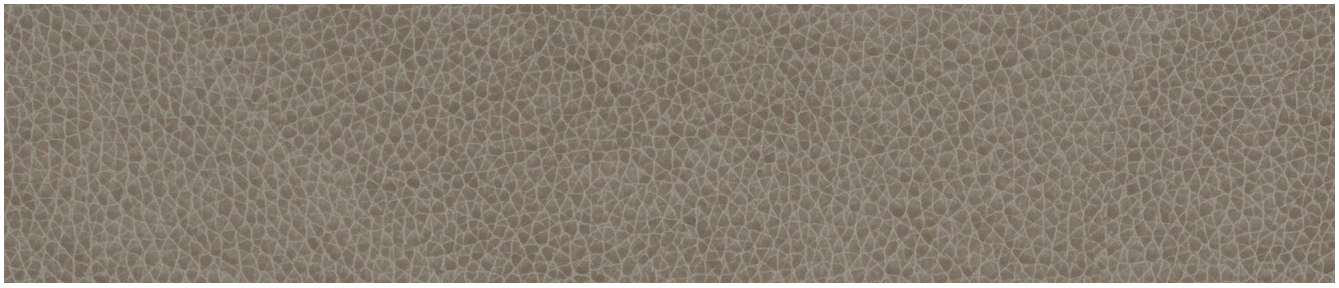

WBTY109 Flintstone



WBTY101 Asphalt



WBTY102 Boardwalk



WBTY104 Chimney



WBTY105 Cordovan

WBTY107 Earth



WBTY108 Feather

WBTY110 Garland



WBTY111 Harbor



WBTY114 Kalahari

WBTY118 Passive



WBTY120 Poseidon



WBTY121 Quarry



WBTY123 Redwood



WBTY124 Retreat



WBTY125 Rye



WBTY128 Whiskey

BRAYTON
PAUL BRAYTON DESIGNS

Writer's Block Tolstoy II

WRITER'S BLOCK™

The super stain resistant polyurethane.

Spills and splatters won't matter with Writer's Block performance polyurethanes. The repel-and-release stain inhibiting system protects from the toughest stains including ink, indigo denim dye-transfer, or food and drink. Beyond clean, Writer's Block faux leathers are engineered to outperform, with healthcare grade hydrolysis resistance, and bleach cleanability.

- Ink and Graffiti Resistant
- Repel and Release Technology
- Denim Dye Transfer Protection
- Ready for Bleach
- PVC-Free

GENERAL SPECIFICATIONS

CONTENT:	100% Polyurethane (Polycarbonate)
WIDTH:	54"
REPEAT:	None
PATTERN DIRECTION:	Up The Roll
BACKING:	100% Polyester
FINISH:	Writer's Block™
WEIGHT:	25.4 oz. per linear yard
APPLICATION:	Heavy Duty Upholstery

KEY PERFORMANCE SPECIFICATIONS

ABRASION RESISTANCE :	250,000+ Double Rubs*
HYDROLYSIS:	10 Weeks
STAIN RESISTANCE:	with Writer's Block
LIGHT FASTNESS:	200 Hours
CLEANING CODE:	W / S / B
BLEACH CLEANABLE:	10% Dilution
CLEANING CODE:	S / W / B
FLAMMABILITY CLASS:**	California TB 117-2013
	UFAC Class 1
	NFPA 260

ACT Symbols:

**Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.*

***ACT® Registered Certification Marks*

CLEANING INSTRUCTIONS

For everyday maintenance, simply clean with a damp cloth or mild soap and water. For soiled areas wipe with non-abrasive general purpose cleaner. Difficult stains can be cleaned using 70% diluted rubbing alcohol and water. It is recommended to wipe the material surface with fresh water after application of cleaner or disinfectant.

ENGINEERED FOR DEMANDING ENVIRONMENTS

Hospitality, Healthcare, Contract, Education, Residential Upholstery

REDUCED ENVIRONMENTAL IMPACT

This product does not pose any exposure risks associated with the chemicals in Prop 65

Phthalate Free

Lead / Heavy Metal Free

BPA Free / Tris Free / Formaldehyde Free

Does not contain Flame Retardant Chemicals

HPD Available

PFAS Free Stain Resistance

Viva

VIVA005 Deep Sea

VIVA007 Cornucopia

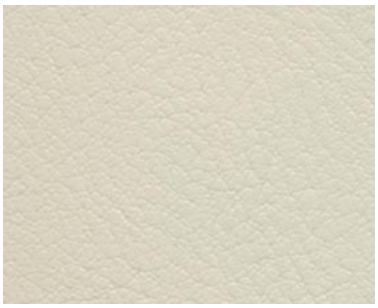

VIVA019 Limestone

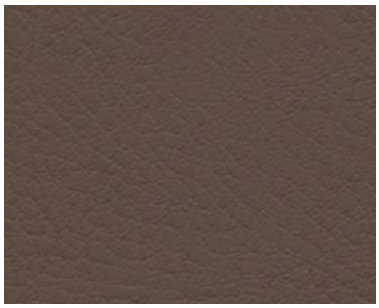

VIVA020 Cattail

VIVA023 Newport

VIVA026 Knight

VIVA033 Quarry

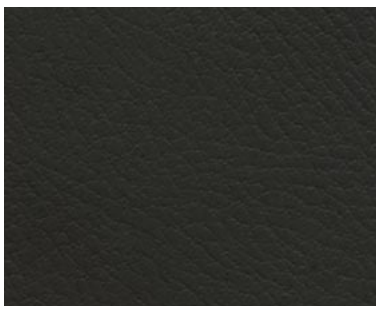

VIVA034 Storm

VIVA036 Sumatra

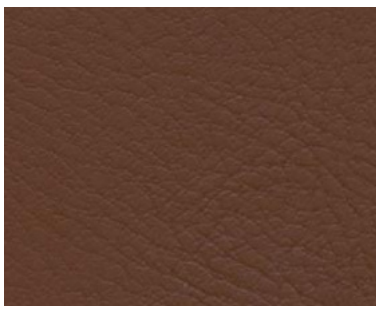

VIVA038 Penny

BRAYTON | TEXTILES

Viva

General Specifications

Composition:	100% Polyurethane
Finish:	PFAS Free Stain Repellent
Backing:	100% Polyester
Width:	54"
Weight:	16.5 ounces/linear yard
Repeat:	None
Pattern Direction:	Non-Directional
Country of Origin:	Taiwan

Performance Characteristics

Abrasion Resistance:	250,000+ Double Rubs (Wyzenbeek)* (ASTM D4157)
Hydrolysis: :	5 Weeks (ISO 1419:1995)
Adhesion Coating:	Warp: 10.28 lbs. / Fill: 9.13 lbs. (ASTM D751-06)
Tear Strength:	Warp: 7.4 lbs. / Fill: 12.7 lbs. (ASTM D751-06)
Breaking Strength:	Warp: 143 lbs. / Fill: 105 lbs. (ASTM D751-06)
Seam Strength::	Warp: 55.9 lbs. / Fill: 44.9 lbs. (ASTM D751-06)
Crocking Resistance:	Dry: Class 5.0 / Wet: Class 5.0 (AATCC 8)
Colorfastness to Light:	Class 5.0 / 200 Hours (AATCC 16.3)

ACT® Registered Certification Marks

**Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance.*

Note: Dye lots may vary slightly.

Flammability Specifications

CAL TB 117-2013 - Pass | UFAC Class 1 | NFPA 260 Class 1

Cleaning & Care

W/S/B, Clean the soiled area with mild soap and water, then rinse with fresh water and wipe dry with a clean cloth.

Bleach Cleanable: 1:10 household bleach to water solution. Thoroughly rinse all solution residue with clean water and air dry.

Sustainability

Prop 65 Compliant
No FR Additives – AB2998 Compliant
No Antimicrobial / Antibacterial Additives
PFAS Free
Heavy Metal Free
BPA Free / Tris Free / Formaldehyde Free
Does Not Contain Conflict Minerals
REACH Compliant
ROHS Compliant
HHI / Greenhealth Compliant

View additional colorways and the complete collection at braytontextiles.com

BRAYTON | TEXTILES

Copenhagen Leather

COPEN01 Black

COPEN02 Slate

COPEN06 Dove

COPEN05 Cloud

COPEN06 Winter

COPEN07 Off White

COPEN10 Shiitake

COPEN14 Wheat

COPEN16 Butterscotch

COPEN17 Spice

COPEN18 Cayenne

COPEN21 Oyster

COPEN23 Cashmere

COPEN29 Sorrel Brown

COPEN30 Dark Chocolate

COPEN50 Blue Spruce

COPEN51 Ultramarine

COPEN52 Cobalt

COPEN53 Horizon

COPEN60 Pine Needles

COPEN65 Pumpkin

COPEN71 Umbria Red

COPEN72 Red Pepper

NEW COPEN81 Vintage


NEW COPEN82 Umber

NEW COPEN83 Foothills

NEW COPEN84 Sandcastle


NEW COPEN85 Greystone

NEW COPEN86 Cool Cloud

NEW COPEN87 Stingray

NEW COPEN88 Bedrock

NEW COPEN89 Truffle

NEW COPEN90 Subtle Spice

NEW COPEN91 Dreamy

BRAYTON
PAUL BRAYTON DESIGNS

Copenhagen Leather

CONTENT:	Full grain leather. Water-based dye. Semi-aniline finish.
BACKING:	None
HIDES: Average 50 sq. ft.	**REPEAT:** N/A
APPLICATION:	Heavy Duty Upholstery
DURABILITY:	250,000+ Double Rubs - Wyzenbeek
FLAMMABILITY CLASS:	California Home Furnishings Bulletin 117, Section E. U.S. Department of Commerce CS-101-53, Class 1. UFAC, Class 1. NFPA 260, Class 1.

LEATHER CARE: Semi-aniline leathers require very little care--general upkeep requires only an occasional wiping with a clean cloth. Occasionally you may gently wipe with a clean, damp cloth to remove accumulated soil, then allow it to air dry. Should a spill occur, immediately blot with a clean, dry, cloth. If soil remains, a solution of lukewarm water and a mild soap (Ivory) may be used. Dampen a clean white cloth with a small amount of soap and gently wipe the affected area using a circular motion. Never apply the solution directly to the leather. Rinse completely with a clean cloth to ensure all cleaner is removed. To avoid damage, do not rub for an extended period. Never use oils, saddle soaps, harsh cleaners or cleaners containing abrasives on semi-aniline leather. Professional cleaning: For stubborn stains or deep cleaning, consider consulting a professional leather cleaner.

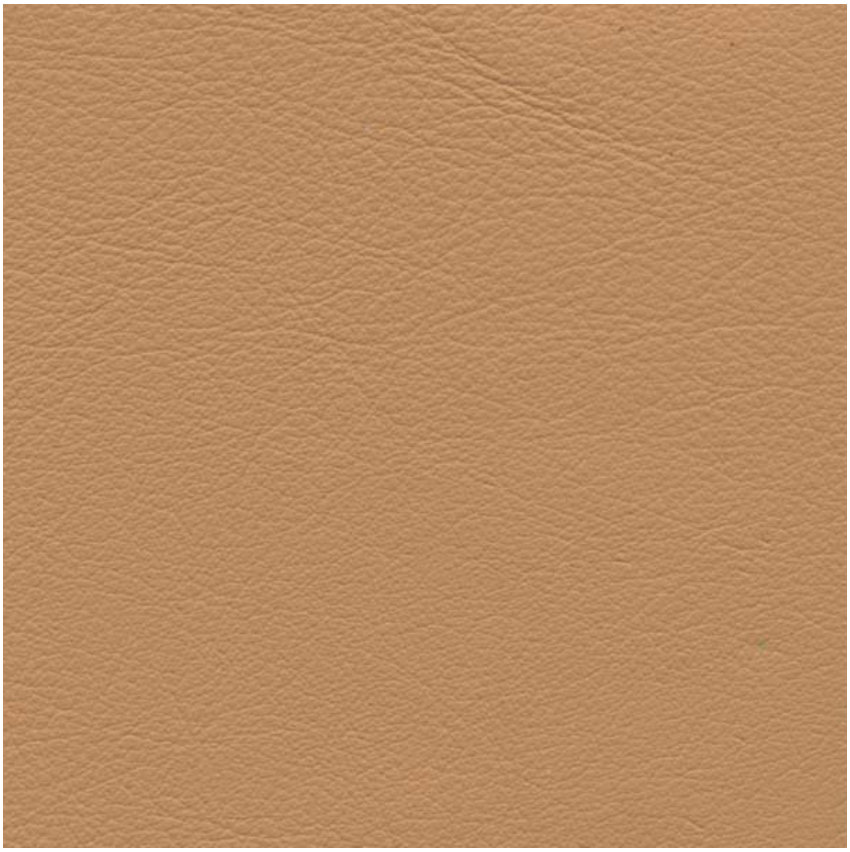

BRAYTON | TEXTILES

braytontextiles.com